

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
1 November 2001 (01.11.2001)


PCT

(10) International Publication Number  
WO 01/82625 A1

- (51) International Patent Classification<sup>7</sup>: H04N 7/173  
Morrisville, NC 27560 (US). BALLOU, Bernard, L., Jr.; 11404 Blackbrook Court, Raleigh, NC 27614 (US).
- (21) International Application Number: PCT/US01/05675
- (22) International Filing Date: 23 February 2001 (23.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/553,524 20 April 2000 (20.04.2000) US  
09/645,087 24 August 2000 (24.08.2000) US  
09/675,025 28 September 2000 (28.09.2000) US  
09/737,826 15 December 2000 (15.12.2000) US
- (71) Applicant: WORLD THEATRE, INC. [US/US]; 900 Perimeter Park Drive, Suite E, Morrisville, NC 27560 (US).
- (72) Inventors: HUNTER, Charles, Eric; 7 Grey Widgeon, Hilton Head Island, SC 29928 (US). HEBRANK, John, H.; 216 Jefferson Drive, Durham, NC 27712 (US). SPARKS, Kelly, C.; 900 Perimeter Park Drive, Suite E, Morrisville, NC 27560 (US).
- (74) Agents: GARRETT, Arthur, S. et al.; Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P., 1300 I Street, N.W., Washington, DC 20005-3315 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

## (54) Title: VIDEO AND MUSIC DISTRIBUTION SYSTEM

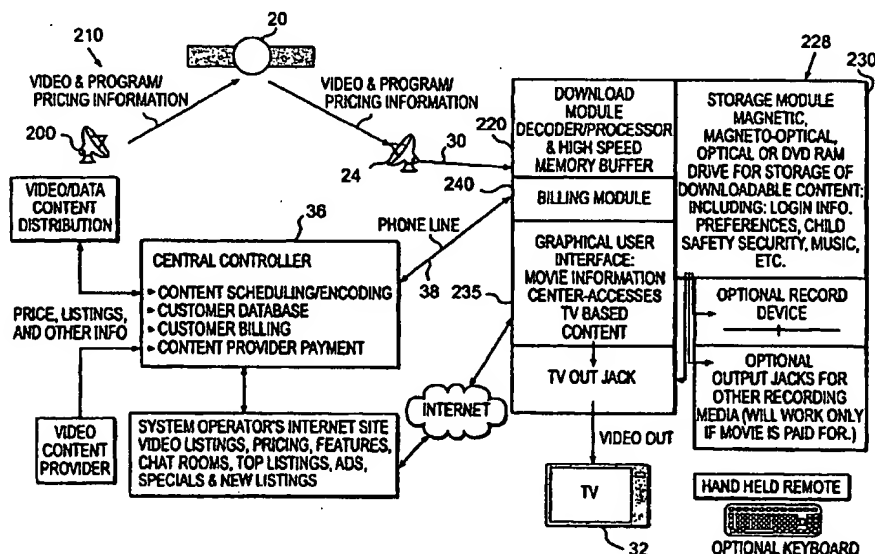

(57) Abstract: The invention relates to video and music distribution systems and, more particularly, to a system that blanket transmits video/audio content such as movies (for example, via satellite downlink transmission) to each customer's recording, storage and playback system. Customers may preselect from a list of available movies or other content in advance using an interactive screen selector, and pay for the video/audio content that is actually viewed.



- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## VIDEO AND MUSIC DISTRIBUTION SYSTEM

Field of the Invention

5           The invention relates to video and music distribution systems and, more particularly, to a system that blanket transmits video/audio content such as movies (for example, via satellite downlink transmission) to each customer's recording, storage and playback system.  
10 Customers may preselect from a list of available movies or other content in advance using an interactive screen selector, and pay for the video/audio content that is actually viewed.

Description of the Prior Art

15           Widespread home television viewing began in approximately 1950 with broadcast networks transmitting shows on specific, prepublished schedules. This model remained the primary model for television viewing for  
20 over thirty years.

          Cable, and later direct broadcast satellite, increased the number of channels. But viewers were still subject to programming schedules.

          Video cassette recorders offered the prospect  
25 of shifting viewing times, provided the end user was one of the thirty percent or less of VCR owners who learned to program their VCR's. Even among those who learned to program their VCR, time shifting via VCR remains subject to properly setting up the timer, assuring the power is  
30 in the correct state, assuring that a correct tape is in the VCR, that the tape is not full, that the tape is properly rewound, etc. Thus, for the majority of TV

-2-

viewers, even at the turn of the century, the TV viewing model has scarcely changed from the mode of 1950.

Video rental stores have provided a sort of "video on demand", subject, of course, to the high cost of video cassette purchases by the rental stores, as well as the high capital outlay for real estate (land and building) and the cost of labor at the stores. Even when a title becomes available through video release, the viewer's ability to watch the show at his chosen time is subject to availability of the video at the store, round-trip transportation to the store and the inevitable problems with late returns, damaged videos, lost videos, etc.

True video-on-demand has been envisioned whereby massive video servers would be positioned in every geographic location to transfer high speed video data streams to the houses of individual viewers at any time a viewer wished to access a particular movie or other content. However, this type of video demand system, after years and billions of dollars of investment, has proven to be too complex and expensive and, therefore, has not been implemented.

A compromise on the video-on-demand concept has been proposed by Replay Networks, Inc. (USA) whereby viewers create their own "replay channels" containing content categorized by, for example, show titles, actor, movie type, etc., with such programming being recorded on hard disks at a local facility and later available for on-demand access by individual viewers. Another type of on-demand video distribution system is described in U.S. Patent No. 5,832,287, whereby video-on-demand and network programming is provided from master file and network program databases through multiple community systems, each of which may serve up to approximately one hundred homes.

-3-

Both the Replay Networks, Inc. and the '287 systems have severe limitations in terms of storage capability and customer options.

An interactive viewing system that automatically records selected programs is disclosed in U.S. Patent No. 5,805,763. However, the '763 system simply provides another mechanism for recording television programs. This system attempts to simplify the VCR recording function, but because of its complex nature and limited benefits it has not been implemented.

There is an acute need in the video distribution industry for a system that will provide each individual viewer with ready access to thousands of movies titles, as well as educational programming, network programming, audio programming and the like, in a convenient low-cost manner that fully satisfies user demand, while enhancing the economic incentives of content providers to create and distribute an ever expanding offering of movies and other video/audio content.

#### Summary of the Invention

The present invention provides a video distribution system that is beneficial to all involved parties, namely consumers, content providers and data transmission providers. In certain embodiments, consumers are able to preselect movies for viewing from as many as thousands of movies that are transmitted daily and as many as sixty thousand movies transmitted monthly. Customers of the video distribution system utilize a menu driven, graphical user interface with simplified controls that provide movie selection by title, type, or category (e.g., comedy new releases from major studios).. In preferred embodiments, video/audio content is blanket transmitted via direct broadcast satellite (DBS) in an encoded, compressed form for playback at VHS resolution

(or other desired resolution). The transmission is directly to each customer's receiving dish or antenna which is linked to the customer's user station where selected movies are stored on DVD RAM discs or CD's in a multiple disc platter, or on a hard drive having a storage capacity of, for example, 20 gigabytes or more. The movies may then be played immediately or at any time desired by the consumer, with the consumer paying only for those movies that are actually viewed. Preferably, the movies are encoded to prevent conversion and duplication for play on existing DVD, CD or other systems. The encoding technology also prevents playback on user stations of the video distribution system in homes that are not current on payments for previous purchases. In certain embodiments, the encoding system includes a novel time-based encoding technology, and movies may be watermarked so that copies are traceable to the customer site.

The video distribution system of the present invention offers numerous advantages to consumers. For example, consumers have access to new movie releases at those times dictated by market conditions to be most favorable by the content providers and the distributors, often before the movies would be available at video rental stores. In preferred embodiments, consumers will pay for a movie only after it has been viewed, not when recorded. Thus, consumers are free to record categories or classes of movies (e.g., new releases) and later make a decision as to which movies to actually view -- paying only for those that are viewed. In certain embodiments, consumers have access to movies that are automatically recorded, such as popular new release movies and movies that are being promoted by the content provider and/or system operator. Consumers may view the videos at any time without restraints related to broadcasting schedules and with no need to visit a video rental store for

selection of the movie or returning the movie. There are no late fees. New movie releases will never be "sold out", as they frequently are in existing video rental stores. Another advantage to consumers is the ultimate  
5 lower cost occasioned by the system's elimination of the real estate and labor costs associated with existing video rental stores. Because literally thousands of movies are available on a daily/weekly/monthly basis, the video distribution system of the invention provides a  
10 much greater selection than any existing video rental store. The invention also provides full access to content for those who live in geographically remote and/or sparsely populated areas that may presently have little or no access to video rental stores. The  
15 invention also allows access to videos for families with young children, elderly persons and handicapped persons where theater viewing and round trips to video rental stores are inconvenient, prohibitive or expensive. Each user station utilizes high capacity storage such as DVD  
20 platters or hard drives for its read/write functions in addition to an operating system that provides greatly simplified on-screen programming. The present invention also provides the ability to update movie pricing at any time, for example on a daily, weekly or monthly basis, so  
25 that consumers can choose to view movies at times when content providers offer pricing specials or incentives. When a movie is recorded on a removable storage medium, it can be labeled and stored for future play or, depending upon the storage medium, recorded over (similar  
30 to a blank VCR tape). As new movies are recorded and shelved, blank or previously recorded media can be inserted into the platter for future recording. Video quality is improved over existing video rentals where, in most cases, available tapes have been degraded by  
35 previous play.

-6-

Content providers (e.g., major studio producers) recognize a very significant benefit in that they receive income every time a movie is played, thereby creating significant residual value for their investments. Importantly, new release movies are always available (i.e., not "sold out") during initial peak demand when pricing power is the highest. The mentioned residual value translates into increased income for the content providers because a significant portion of existing content is available for sale every day -- since thousands of movies are transmitted on a daily/weekly/monthly basis. The invention also allows content providers to change pricing at any time, e.g., daily/weekly/monthly, to optimize price vs. consumer demand. In this regard, content providers are allowed to meet consumer demand for a significant portion of the existing content inventory value every day. This provides an extremely high benefit by effectively allowing the market to clear (i.e., real demand matches supply), something that the current video distribution model (TV, movie channels, pay-per-view and video rental) do not provide. Additionally, content providers may provide preview material for download that is specific to user profiles.

According to the invention, content providers may be confident that they can distribute their movies with extremely high security through the use of appropriate encoding technology. The encoding may include time-based encoding technology, with new code keys for every distributed movie transmitted via phone/modem with billing queries every month. Time-based coding, in combination with a single standard operating system, allows the video distribution system operator to achieve the level of security demanded by content providers. Watermarks coded to each site may be placed in any playback signal to assure that movie copies, even



-7-

those made by recording at the input to the TV or monitor can be traced to a specific site or purchase.

Transmission providers (DBS satellite system providers, in preferred embodiments) realize the advantage of a significantly increased income base for supporting their services and the utilization of lower cost, off-peak time for transmission of a significant portion of the movies, as well as opportunities to market other products and services to specific customer profiles.

In one aspect, the video distribution system of the present invention includes a data transmission system which blanket transmits a plurality of encoded movies to customer households. A user station is provided at each customer household, the user station including means permitting the customer household to preselect desired transmitted movies for recording. A receiver and associated recording device at each customer household is provided for recording movies. The recorder may be an internal or external hard drive, DVD or CD recording device or other appropriate device. A playback device permits each customer to play back those recorded movies that the customer desires to view. The video distribution system also includes a central controller system having a database for storing therein an address corresponding to each customer household, a communications link between each customer household and the central controller system to verify to the controller unit that a recorded movie has been played back for viewing and a billing system linked to the central controller system to bill customer households for only those recorded movies that are played back for viewing.

In another aspect, the invention may be defined as a method of distributing movies to customer households comprising the steps of blanket transmitting a plurality of movies to customer households, permitting each

customer household to preselect and record desired movies, permitting each customer household to playback for viewing any recorded movie, communicating movie playback information from each customer household to a  
5 central controller, and billing customer households for only those recorded movies that are played back for viewing.

Other embodiments allow downloading and storage of marketing material, information, transmission  
10 schedules, or even several movies that are currently in high demand.

#### Brief Description of the Drawings

Some of the features of the invention having  
15 been stated, other features will appear as the description proceeds, when taken in connection with the accompanying drawings, in which --

Figure 1 is a schematic representation of a video distribution system consistent with the present  
20 invention utilizing global satellite downlink data transmission.

Figure 2 illustrates further details of a user station shown in Figure 1.

Figure 2A is a view of the user station of  
25 Figure 2 showing several optional features.

Figure 3 shows a hand held infrared remote control for use in association with the user station.

Figure 4 is a block diagram showing components of a representative user station of the invention.

30 Figures 5-7 show several screens that appear on the display when a customer reviews available movies, preselects movies for viewing and performs other associated functions using the interactive program guide.

Figure 8 illustrates a Level I time-based  
35 coding format that provides enhanced security for the transmitted programming.

Figure 9 is a block diagram showing functions of the central controller system.

Figure 10 is a block diagram of one simplified embodiment of a business model for commercializing a video distribution system consistent with the invention.

Figure 11 is schematic representation of another satellite-based video distribution system that utilizes a relatively large hard drive as the primary data storage medium.

Figure 12 shows the operational sequence for use of the video distribution system of Figure 11.

Figure 13 shows a screen containing one example of a simple graphical user interface used by a customer to enter customer movie preference information by movie type.

Figure 14 shows a screen containing another example of a graphical user interface for entering more complex, multilevel customer preference information.

Figure 15 is a block diagram showing how customer preference information entered by customers and general population clustered preference data compiled and analyzed by the system operator are used to create customized preference-based downloading choices at the customer user stations.

Figure 16 is a flow sheet showing the procedure for promotion-based streaming of movies, for example where a movie distribution company decides to push a selected movie as a promotion.

Figure 17 is a schematic representation of an embodiment consistent with the invention wherein the video portion of a movie is highly compressed prior to being blanket transmitted at low resolution. The video is enhanced by an upconverter at the customer's user station (set top box), thereby permitting transmission and storage of the video as a smaller file while still

-10-

permitting the customer to enjoy a picture with the desired resolution, for example, VHS resolution.

Figure 18 is a schematic representation of another embodiment consistent with the invention wherein  
5 a hardware implementation of artificial neural networks is used to sample the video portion of a movie frame by frame to create a library of neural patterns. The library of patterns for the movie is blanket transmitted along with very low resolution, highly compressed encoded  
10 video, with the transmitted video file undergoing pattern recognition image enhancement at the set top box and, optionally, up-conversion as well.

Figure 19 is a schematic representation of an embodiment that is similar to that of Figure 18 except  
15 that the set top box contains in memory a universal library of neural patterns for image enhancement of the transmitted video so that a complete, unique pattern library for each transmitted movie does not have to be transmitted along with the movie.

Figure 20 is a schematic representation of another embodiment similar to that of Figure 18 with the additional feature that the video portion of the movie is transmitted with a uniform pattern of added noise that is used as copy protection encryption. The noise is removed  
20 by the processor in the set top box, as the processor is also enhancing the image.

Figure 21 is a representation of how neural patterns can be grouped in the library by frame type.

Figure 22 is a representation showing how, as a  
30 video file is being scanned, the specific frame types of Figure 21 are noted and stored in the pattern library.

Figure 23 is a block diagram of a companion set-top box that connects to an existing satellite or cable TV receiver box for use with a system consistent  
35 with the present invention.

-11-

Figure 24 is a partly schematic representation of the companion box of Figure 23.

Figure 25 is a block diagram of the principal components of a mobile or mounted playback device for viewing movies recorded by a system customer on a removable media such as CD or DVD.

Figure 26 is a pictorial view of a mobile playback device incorporating the features illustrated in Figure 25.

Figure 27 is a pictorial view of a playback device that is mounted, for example, on the seat back of an airplane, train or automobile.

Figure 28 is a pictorial view of another form of mobile playback device that incorporates a hard drive.

#### Detailed Description of the Invention

While the present invention will be described more fully hereinafter with reference to the accompanying drawings, in which aspects of the preferred manner of practicing the present invention are shown, it is to be understood at the outset of the description which follows that persons of skill in the appropriate arts may modify the invention herein described while still achieving the favorable results of this invention. Accordingly, the description which follows is to be understood as being a broad, teaching disclosure directed to persons of skill in the appropriate arts, and not as limiting upon the present invention.

#### 30 The Overall Video Distribution System, Generally

Referring to Figure 1, there is shown a simple schematic of one embodiment of a video distribution system 10 consistent with the invention. System 10 utilizes direct broadcast satellite (DBS) transmission via satellite 20 from a video distribution system operator as the means for blanket transmitting encoded

-12-

programming data, either in real time or in time compressed format (discussed below) to a large number of customer households. The program data is received at each customer household by a receiving antenna or dish

5 24. Dish 24 is linked to a dedicated user station 28 by a satellite receiver link 30. User station 28 is an interactive device permitting customers to preselect desired transmitted movies, record the preselected movies and play back the recorded movies on a video display

10 device (e.g., television 32) anytime the customer wishes to view them. Each station 28 communicates at appropriate times with a central controller system 36 via a phone/modem connection 38 (land, Internet or cellular). Central controller system 36 stores a discrete address

15 (e.g., telephone number, credit card number or billing address) for each customer household and receives information via connection 38 to verify that a preselected, recorded movie has been played back for viewing. Central controller system 36 utilizes the movie

20 playback information to bill customer households and also to credit the accounts of content providers. The satellite link (or alternatively the central controller system 36) periodically communicates with each customer household to provide information on available movies and

25 when they will be transmitted, along with pricing information for the playback of specific movies or categories of movies. In preferred embodiments, the satellite link and phone/modem connection 38 transmit time-based code keys for the transmitted movies that form

30 part of the security system for the video distribution system.

Figure 2 illustrates the front panel of one embodiment of user station 28. Station 28 includes a port for the satellite receiver link 30, a phone/modem

35 connection 38, a remote infrared sensor 44 and a DVD platter 46 (e.g., a 10-disc platter) which is utilized as

-13-

the write/read mechanism for recording and playback of movies or other content. User station 28 also includes a user interface comprising a power on/off switch 50, a five key program selector 54, a "Programs Recorded" key 5 62 and a platter out/in key 66, all of which preferably are duplicated on an infrared handheld remote 70 (Figure 3). A more detailed discussion of the use of user station 28 to review movie availability, to preselect, record and playback movies will be set forth below in the 10 description of the viewer interface and interactive program guide.

#### The Satellite(s)

According to preferred embodiments consistent 15 with the present invention, data transmission is achieved utilizing geostationary satellites operating in the KU band that are downlinked to conventional receiving antennae or dishes located at the customer households, which are in turn linked to TV Receive Only (TVRO) units 20 included in customer user stations 28.

Following the recent acquisition of PrimeStar's assets by Hughes, there are now two digital broadcast satellite providers in the United States, Hughes (DSS) and EchoStar (DISH Network). EchoStar's DISH network 25 launched an additional satellite in September 1999 (its fifth satellite) that, in combination with its previous satellites, provides continuous transmission of greater than five hundred channels to substantially the entire continental United States. EchoStar now has satellites 30 located in the 119, 110, 61.5 and 148 degree positions within the Clark Belt.

With the above satellite orientations, EchoStar's new "DISH 500" system utilizes an elliptical twenty inch antenna or dish containing two LMBS heads 35 that can receive information from two different satellites simultaneously. As mentioned above, this

-14-

system permits greater than five hundred channels to be directly broadcast to each customer household.

Currently preferred embodiments consistent with the present invention utilize the EchoStar system, most preferably the DISH 500 system, for programming data transmission at either real time or time-compressed transmission rates, discussed below. In alternative embodiments, the invention may be implemented utilizing the Hughes (DSS) system, or a combination of both the Hughes and EchoStar systems (resulting in a relatively smaller portion of each system's total capacity being devoted to the invention's video distribution).

#### Data Transmission Parameters

EchoStar's DISH 500 system has 480 X 704 resolution, providing a very high band width of approximately 4 megabits/sec for each channel, for a total transmission capacity of approximately 2000 megabits/sec for five hundred channels.

As mentioned above, in accordance with certain preferred embodiments consistent with the invention, the video content (e.g., movies) may be broadcast at standard VHS resolution (240 X 352) which translates into a requirement of approximately 1.3 megabits/sec per channel with MPEG II compression. Thus, the full (greater than 2000 megabits/sec) capability of the DISH 500 system translates into the capability to broadcast approximately 1,530 movies simultaneously in real time (i.e., not time compressed). At 110 minutes per movie, the full twenty-four hour capacity is approximately 20,000 movies per day, far greater than total requirements for the video distribution system of the invention.

Thus, according to this aspect of the invention, a portion of the total transmission capability of the DISH 500 system may be utilized to blanket transmit thousands of movies for preselection and



-15-

recording by customers. In this regard, and as discussed in more detail in the Examples below, new release movies (e.g., the 100 most popular new release movies from major studios) may be transmitted several times per day with concentration before and during prime evening viewing periods, with a second tier of popular movies transmitted less often, but still at least daily, and third and fourth tiers of movies transmitted weekly/monthly -- all in accordance with content listings and transmission schedules available to customers through their periodically updated electronic program guide.

It will be appreciated that instead of using more typical 120 watt DBS transponders, implementation of the present invention may be carried out with higher power transponders (e.g., 240 watt transponders) to increase the effective transponder capacity (e.g., from 23 megabits/sec to 30 megabits/sec) by reducing much of the capacity allotted for forward error correction and system management inherent in lower power transponders. Also, along with the use of higher power transponders, the invention may be carried out with quaternary (QPSK) polarization to double the effective bit transfer rate for each transponder over that which may be obtained by using current orthogonal polarization -- with a sacrifice in bit error rate that is acceptable for those applications of the invention where lower video and audio resolution is not an important consideration to the customer. Thus, the use of high power transponders (e.g., 240 watts or higher) in conjunction with higher level polarization (e.g., quaternary) permits video distribution systems of the invention to be implemented utilizing less of the DBS system's total transmission capacity, permits the transmission of a greater number of movies or other content, permits more frequent transmission of high demand (e.g., Tier 1) movies and permits greater time compression of movies, or a

-16-

combination of the above, all to the benefit of consumers.

#### User Station Details

5           Figure 4 is a block diagram showing components of a representative user station 28 consistent with the invention. The primary controller for station 28 is a central processing unit (CPU) 80 that includes a microprocessor, a non-volatile high speed memory device  
10 containing an operating system, a graphics generator, and additional peripheral devices, such as a clock, that are common in CPU devices.

          Encoded programming data as a datastream via satellite downlink through antenna 24 is transmitted to a  
15 decoder 82. Decoder 82 looks for headers in the datastream indicating movies or other content that have been preselected for recording. The programming data includes video/audio content data, content availability/scheduling data and content pricing data.  
20 Decoded preselected movie data is transmitted via CPU 80 to a high speed memory buffer 84 (with or without high capacity storage capability) and then written to a high density record/playback drive 86, such as a DVD drive associated with the DVD platter 46. In certain  
25 embodiments, the high speed memory buffer 84 may utilize a magnetic drive, a magneto-optical drive, an optical drive, or other suitable drive. Buffer 84 may utilize DRAM, flash memory, SRAM or other suitable memory media such as digital tape.

30           As will be appreciated by those skilled in the art, in alternative embodiments the transmitted data may bypass CPU 80.

          An internal or external modem 87 connects to a phone line that provides communication to the central  
35 controller system 36.

-17-

The content availability/scheduling data, content pricing data and time-based security codes B (discussed below) are transmitted at periodic intervals (e.g., every ten minutes, every hour or every day, as  
5 deemed most desirable by the video distribution system operator) and are routed from CPU 80 to RAM 88 where the information is stored and available.

Viewed-content information used for billing purposes, content preselection information entered by the  
10 user and time-based security key codes C (discussed below) are stored and available in SRAM 90.

CPU 80 directly receives manual and infrared remote operation input data. Video display device 32 receives input from recorder 86 for playback of movies  
15 and receives graphics data from CPU 80 for display of an interactive program guide.

It is understood that important aspects of this invention may be provided by different electronics configurations such as a central server to support, and  
20 in certain cases to replace, functions carried out by the RAM, SRAM and DVD drive shown in Figure 4. In addition, SRAM or a suitable high speed memory drive could be used to fulfill the function provided by RAM 88 (shown in Figure 4). Other embodiments may include an additional  
25 disc drive in support of the system data storage and retrieval functions.

#### Viewer Interface/Interactive Program Guide

The viewer interface and interactive program  
30 guide will now be described in connection with how they permit a customer to review available movies, preselect movies for recording, playback movies for viewing and perform other associated functions.

Referring to Figure 5, there is shown a  
35 representative screen 100 that is displayed on video display device 32 when a user initiates use of the system

-18-

via on/off key 50. By utilizing the four (up/down, left/right) keys of program selector 54 and by clicking on "Programs Recorded", the user may choose to first determine the status of the multiple (e.g., ten) disc positions in the DVD platter 46, i.e., what movies are currently recorded and stored in the DVD platter 46 at which disc positions (or "slots"), which disc positions contain blank discs and which disc positions have no discs. Figure 6 shows a representative screen 110 indicating the status of each disc position. Once this information is displayed, the user may elect to playback a movie that is already on the platter, remove disc(s) for storage, etc.

After, or instead of, using the "Programs Recorded" function, the user may use the "Available Movies" function to scroll down through a listing of movies in the interactive program guide that, as shown in Figure 5, may be based on various categories of available movies. For example, the first category of movies is new releases, which may be subdivided into, for example, comedy, action, drama, documentary, etc. After a particular category of movies is chosen (e.g., new releases/comedy), another screen 120 (Figure 7) is displayed showing the titles (in this case, twenty titles) in this category. In order to preselect a title for recording, the viewer moves the cursor to the chosen title and presses the middle key of program selector 54, the first press showing the current playback price and changing the background color of the display (indicating "selection mode") and the second press completing the selection.

It will be appreciated that the interactive program guide may include links to a short summary of a movie being considered, critical review(s) of the movie or a brief "clip" or preview of the movie. This information may be stored in internal memory, obtained

-19-

through a link to the website of the video distribution system operator or obtained by direct Internet access to the websites of film producers, movie rating services, etc. (See Figure 2A.) Other suitable means for providing movie information may also be employed.

#### Program Security Utilizing Encoding Technology

As mentioned above, in certain embodiments consistent with the invention, programming security is best achieved by time-based coding, in combination with the utilization of security codes that are interlaced into the video frames.

The operating system of user station 28 utilizes standard interlaced encoding data that, as known in the art, prevents movies recorded by a customer at a user station from being played on other nonconforming playback devices (for example, standard DVD playback devices). In addition, recognizing the possibility of pirates utilizing data conversion technology to defeat this security technique so that bootleg copies could be run on other systems, and recognizing the prospect of recorded movies being played on user stations that are not current on payment or are otherwise unauthorized, the invention incorporates a time-based code key to assure that playback of recorded content can only occur on currently authorized user stations.

Figure 8 describes one preferred Level I time-based coding format wherein a first code key A comprises a 32-bit monthly code at the beginning of each transmitted movie. With one such code key provided for each month over an extended period of time, say 100 years, there is a total of  $12 \times 100 = 1200$  32-bit code keys A per movie.

A second code key B comprises a 32-bit code for each month chosen by the video distribution system operator at the beginning of each month. Code keys B for

-20-

all available movies are blanket transmitted to customer households each month by the data transmission means, preferably, satellite.

5 A third code key C comprises another 32-bit code for each available movie. Code keys C are delivered to each customer household by phone/modem on a monthly basis, preferably at the time of monthly billing queries from central controller system 36 to the household. The third code keys C are provided only when the customer  
10 household is current in payments and otherwise is in good standing.

The time-based coding of Figure 8 assures that a movie will playback at a specific user station only when all three code keys A (transmitted with the movie),  
15 B (chosen and blanket transmitted monthly) and C (delivered monthly by phone modem) are present, with the user station software simply verifying that C is the correct value when a predetermined mathematical function is applied to A and B.

20 Level II security coding comprises a 128-bit code interlaced through every third frame of the movie. This code, in conjunction with the decoding software of the unit's operating system, is used to assure that recorded movies can be played only on stations provided  
25 to consumers by the video distribution system operator. (The players incorporated into the user stations of the video distribution system simply read and ignore Level II code.)

Thus, recorded movies may not be played back on  
30 standard DVD players. However, even if a determined pirate were to defeat the Level II code to produce a disc playable on a standard DVD player, a pirated copy would be useful only until the end of the month, due to Level I time-based coding protection, discussed above.

35 Optional Level III coding may be utilized to relate Level I and Level II coding in a specific location

-21-

in each movie over multiple frames where the Level II code is a more complex (e.g., 1024K) program requiring completion from the time-based coding of Level I.

In addition to the security means discussed above, preferably each user station 28 must be in an enabled state. In this regard, an enabling command from central controller system 36 (via phone/modem) may be sent monthly to each customer household that is in good standing.

To deter production of copies of movies recorded at input terminals of TV 32, a digital watermark identifying the purchasing customer may be placed in the movie signal. The watermark would be unnoticable to a viewer but would allow copies of the movie to be traced to the original purchase site.

As an alternative to monthly billing queries by central controller system 36 to each customer household, monthly provision of code keys C and monthly provision of an enabling command to customer households in good standing, as described above, these functions may be carried out each time a movie is played back for viewing via a two-way communication between central controller system 36 and the customer household. To this end, when a customer initiates playback of a movie through the interactive controls, the playback information (the identity of the movie and the identity of the customer household) is communicated to central controller system 36 by phone/modem, at which time central controller system 36 verifies good standing status for the customer household and sends back a single code key C for the specific movie and an enabling code for the user station. Utilization of this form of communication between a user station and central controller system 36 at the time of every playback offers the advantage of the video distribution system operator not having to send thousands of key codes C (for all available movies) on a monthly

-22-

basis to each customer household (where the key codes C must be stored in memory) and the further advantage of assuring good standing of the customer household's account prior to each movie playback. A further  
5 advantage is that customers' accounts may be billed more currently, at the time of each playback instead of monthly.

#### Central Controller System

10 Referring to Figure 9, central controller system 36 will now be discussed in more detail. As discussed above, in one preferred embodiment, central controller system 36 provides the following functions:

1. Stores a discrete address for each  
15 customer household.

2. Transmits monthly billing query to each customer household to determine which preselected, recorded movies were viewed.

3. Sends monthly transmission of time-based  
20 security codes "C" and an enabling command to each customer household that is current in its payments and otherwise is in good standing.

4. Credits accounts of content providers for the use of their content through linkage to a financial  
25 network.

5. Debits accounts of customers for movies viewed.

#### Alternative Data Transmission Technologies

30 Referring to Figure 2A, several alternative data transmission technologies may be utilized in place of or in addition to direct broadcast satellite (DBS) which is discussed above.

A first option is data transmission by optical  
35 fiber employing suitable technology, preferably an optical fiber technology providing high transmission



rates, for example OC3. A single OC3 optical cable transmits data at approximately 128 megabits/sec so that, at VHS resolution, it can transmit approximately sixty movies simultaneously at real speed, or transmit one  
5 movie every two minutes at a time-compressed speed.

Other options include cable/modem transmission, Internet connection, other suitable phone connections, or the use of higher or lower frequencies than KU if licensed for satellite-based content transmission, or a  
10 combination of any of the transmission means discussed herein.

It will be appreciated that video/audio content transmitted by any of the above means, whether transmitted at real time or at a time-compressed speed,  
15 may run in series for simultaneous recording on multiple stations at a consumer household.

#### Business Models

The present invention provides significant  
20 flexibility with respect to the business model to be used to commercialize the invention. In one simplified embodiment, shown in block diagram form in Figure 10, the video distribution system operator interfaces with three parties: a data transmission provider, content providers,  
25 and consumers. The content providers provide content (e.g., music and movies) to the data transmission provider which, in turn, blanket transmits the content to the consumers, preferably by direct broadcast satellite. The satellite transmission also includes content  
30 availability/scheduling data and content pricing data, updated periodically. The content providers also provide copyright license and pricing requirements to the video distribution system operator. Both the data transmission provider and the content providers receive payments  
35 directly from the video distribution system operator. Lastly, the video distribution system operator

-24-

periodically receives viewed-content information for billing, while also sending enabling commands to the consumers.

Other business models may utilize time-based security coding as discussed above. Also, the Internet may be used to provide centrally posted content availability information and permit preselection of movies for recording at the customer's household.

#### EXAMPLE I

The video distribution system of the present invention is implemented using the business model of Figure 10, the DISH 500 DBS system, and the other hardware and software systems described above and illustrated in the drawing figures.

The video/audio content provided by the video distribution system is transmitted in real time (i.e., not time-compressed -- average movie 110 minutes). The movies are blanket broadcast utilizing approximately 49% of the total capacity of the DISH 500 system, with transmission times heavily weighted for Tier 2, 3 and 4 movies to off-peak broadcast hours (e.g., 1:00 am - 8:00 am).

#### Movie "Hierarchy"

- 25 Tier 1: The current 100 new release movies from major studios.
- Tier 2: The 6000 movies that are at the second level of consumer demand after the Tier 1 new release movies.
- 30 Tier 3: The 8000 movies at the third level of consumer demand.
- Tier 4: 60,000 additional movies.

#### Transmission Schedule

-25-

- Tier 1: Each new release movie is transmitted every day on the hour from 4:30 pm to 8:30 pm, and at several other times daily.
- Tier 2: Each Tier 2 movie is transmitted once per day.
- 5 Tier 3: Each Tier 3 movie is transmitted once per week.
- Tier 4: Each Tier 4 movie is transmitted once per month.

A consumer who wishes to plan ahead can easily  
10 record all new releases in the "comedy" category, for example, and have them available for viewing at his pleasure, with payment obligations arising only for those movies he actually views, when he views them. The same consumer or another consumer wishing to view a new  
15 release on the evening at which the viewing decision is made, simply preselects the movie for recording any time during the day so that it will be available during the evening viewing hours. An Internet phone/modem connection (not shown) may be provided so that consumers  
20 may access their user stations from remote locations (e.g., from their business offices) to preselect movies for viewing that evening.

The term "movies" as used in connection with the Examples, and as used at other times herein,  
25 encompasses more than the term traditionally implies. The term "movies" may encompass not only motion pictures and similar content, but also certain content that appears in the lower tiers, especially Tier 4, such as classic sporting events (e.g., all Super Bowls) and  
30 popular TV series (e.g., all episodes of *Star Trek* or *Sienfeld* or *I Love Lucy*). In this regard, a customer who wishes to do so may record all episodes of *I Love Lucy* (transmitted monthly in Tier 4) on DVD platter 46, store the discs and play back selected episodes any time he  
35 desires, paying only when he views an episode or episodes.

-26-

EXAMPLE II

The video distribution system of Example II is implemented with the same tiers of movies as Example I with the difference being that the Tier 1 movies are transmitted in compressed time format to high speed memory buffer 84 contained in user station 28 which, in turn, writes to recorder 86 at its maximum write speed. This compressed time transmission (e.g., 8 to 10 minutes per movie) permits consumers to have movies, particularly Tier 1 movies, available on short notice, often in a time less than or on the order of that time required for a round trip to a video rental store. To further facilitate this enhanced availability of movies on short notice, according to Example II Tier 1 new release movies are transmitted every 30 minutes from 5:30 pm to 8:30 pm, and at several other times daily.

EXAMPLE III

Same as Example II except that all movies are transmitted in compressed time format.

EXAMPLE IV

The video distribution system of this Example IV is implemented with the same tiers of movies as Examples I-III. According to Example IV, drive 86 of user station 28 comprises a magneto-optical disc recording and playback device that has the capacity to write to a magneto-optical disc at write speeds on the order of 12 megabits/sec or greater, a write speed that is approximately 6 to 10 times the data stream speed for conventional VHS resolution video/audio transmission and playback (with conventional MPEG II compression). Utilizing an approximately 12 megabit/sec write speed, and a corresponding data transmission speed via DBS or other suitable transmission means, a movie may be transmitted in time-compressed format and recorded at 8

-27-

to 10 times real time, so that a 110 minute movie may be transmitted and recorded in approximately 11 to 14 minutes or less.

In order to provide ready consumer access to new-release movies, each of the 100 Tier 1 movies is broadcast from 6:00 p.m. to 9:00 p.m., at 15 minute intervals. Thus, during these prime time hours, a consumer may select any Tier 1 movie and have it available for viewing within 15 to 30 minutes. (With faster transmission and write speeds the Tier 1 movie availability time period may be reduced accordingly.) As with Example II, the Tier 1 movies are also transmitted at several other times daily, for example, hourly.

According to Example IV, Tier 2, 3 and 4 movies are also transmitted and written to discs in compressed time, for example, at approximately 12 megabits/sec or greater.

#### EXAMPLE V

The distribution systems described in Examples I-IV have the capability to transmit audio in compact disc (CD) quality or another form to a suitable storage medium such as read/write CD's, write only CD's, DVD, magneto-optical disc, digital tape or a central server. In this Example V, the consumer may choose any music selection from up to as many as 80,000 or more titles in a tiered transmission structure similar to Examples I-IV and use less than 10% of the existing DBS transmission capacity.

With music distribution under this Example V, the system allows the user to listen to the recording (e.g., CD) several times for free before the consumer is required to permanently select the CD. Once permanently selected, the CD receives a permanent enabling code and the consumer pays a one time fee -- similar to the current one-time fee structure which is standard in the

-28-

existing music distribution business model. The player then plays the CD through TV speakers or provides an audio output to an optional external audio system (Figure 2A). This music distribution model eliminates a significant portion of the labor, real estate and transportation costs inherent in the current distribution models for music, much as the novel movie distribution model described herein eliminates costs in the distribution of movies as compared to current models. The music distribution model of this Example V may utilize DBS or the alternative data transmission means described above, either alone or in combination.

#### EXAMPLE VI

The distribution system of Example IV is augmented with CD quality music transmission capability where 10,000 titles per day are transmitted at a time-compressed speed of, for example, 12 megabits/sec or greater. The music transmission of this Example VI may be carried out by utilizing additional DBS capacity, by reducing the number of Tier 2 movies transmitted daily, by reducing movie transmission in other tiers, or by a combination of the above. As described above in connection with Example V, the customer may listen to the recording several times for free after the encoded transmission is stored (with or without the use of memory buffer 84), before the purchase selection. Once the purchase selection is made, the recording preferably is written to a conventional CD so that it may be played back on conventional home or auto playback devices. To this end, user station 28 may include positions for holding and writing to conventional CD's -- in addition to the ability to write to another medium such as DVD or magneto-optical discs used for storage of movies. In the alternative, once the recording is selected, it may be routed to the external audio system (Figure 2A) which has

its own CD read/write or write only device that will permanently write the selected recording to a CD that can be held in a single, stack or platter system.

5    One Alternative User Station Configuration

Figure 11 illustrates an alternative user station configuration that is substantially similar to user station 28 of Figure 1, 2, 2A and 4, with a primary difference being the use of a high capacity hard disk drive as the primary memory component. The encoded video content is scheduled and transmitted to the direct broadcast satellite up-link facility 200 by the video system distribution operator through system controller 36. In addition, periodic digital program/pricing information is transmitted to up-link facility 200, for example, every ten minutes. The digital video content and program/pricing information, once received by the appropriate satellite 20, are then transmitted down to broad geographic coverage areas (i.e. "blanket transmitted") for user stations 228 to receive the downlink transmissions via the home user's satellite dish 24. Data is then transmitted to a download module 220 contained in user station 228 where it is stored digitally in storage module 230, preferably in a large hard disk drive having a storage capacity of 20 gigabytes, or more. The use of a hard disk drive of suitable size permits the storage of six to twenty or more movies at one time in storage module 230. Thus, a video distribution system may be operated with customers storing and playing back movies solely by using the hard disk drive of storage module 230. Additionally, for those customers desiring to build a library of movies, user station 228 may include an optional recording/playback device that records movies onto, for example, a DVD, and plays back these movies through user station 228 at any desired time, with customers paying

-30-

only when they view the movies. While it is preferred that the movies in such a library remain fully encoded and encrypted for playback only on a user station in the system operator's network, user station 228 may include a  
5 CPU or CODEC capable of real-time decryption and decompression as the movie is recorded to a storage medium such as a DVD, so that such movies may be played on a standard DVD player. The decryption/decompression process preferably processes digital watermarks in these  
10 recorded movies so that a unique customer or transaction number is hidden in the movie, thereby allowing a copy of the movie to be traced to its source. Suitable watermarking technologies are available to those skilled in the art.

15 The transmission of movies in compressed time format has been discussed above. This mode is particularly appropriate when larger hard disk drives are installed in the user station 228. A typical VHS movie requires about 10 gigabits of storage (about 1.3  
20 gigabytes), and an HD movie requires about 12 gigabytes of storage. Thus a 20 gigabyte hard drive could hold a dozen VHS movies or one HD movie. Typical receivers can receive a maximum of 27 megabits per second per transponder and current units can only receive one  
25 transponder at a time allowing downloading a typical 110 minute VHS movie in about eight minutes or an HD movie in about 55 minutes. Other receivers may contain multiple tuners allowing simultaneous downloading of several movies, or a movie and a CD, or several CD's while  
30 watching a live baseball game.

The sequence of operation for a customer of the system using user station 228 is summarized in Figure 12, which is large self-explanatory. The illustrated modes of operation, following account set up, are identified as:

35

1. Selection



-31-

2. Ordering
3. Downloading
4. Viewing
5. Billing
- 5 6. Optional "Library" Copy Delivery.

"On-Demand" Movies

As discussed above, storage module 230 of user station 228 includes a storage medium (e.g., a hard disk drive) that stores each movie that the customer selects until such time as the customer either deletes the recording from memory, or the recording is written over when the storage medium's capacity is reached (e.g., on a "first in, first out" basis). When the user station is provided with a storage module 230 having a substantial data storage capacity, it is possible for many movies to be immediately available to the customer for viewing. For example, a user station in the form of a DBS (or cable) system "set top box" may have a hard disk drive with a storage capacity on the order of 20 Gigabytes or more, with most of the storage devoted to the movie storage function of storage module 230. This storage medium permits the storage of approximately six to twenty, or more, compressed movies at all times in each customer's user station. The customer, therefore, at all times has immediate on-demand access to the movies in his storage module for viewing or permanent recording on his recorder (e.g., DVD writer). Movies on the hard disk drive preferably are stored in encrypted format to prevent piracy.

Thus, one advantage of a large storage capacity at storage module 230 is that a customer may maintain a significant number of movies in storage for a considerable period of time before having to make a decision on whether to view (and pay for) a particular movie. However, this large storage capacity opens up

-32-

other possibilities, as well. For example, according to one manner of carrying out the invention, the system operator may automatically (i.e., without requiring customer preselection) download certain very popular movies (usually very popular new releases) to every customer storage module on a periodic basis, such as one featured movie every day. At one automatically downloaded movie per day to each customer, a fifteen movie storage capacity and a "first in, first out" write-over protocol would permit each automatically downloaded movie to remain in storage module 230 and available for on-demand viewing for approximately two weeks, with the exact time depending upon how many customer-selected movies are downloaded during that period. Thus, over any two week period, the system operator may automatically make available (at one automatic download per day) 14 popular movies for all customers, without the customers having to preselect anything. Of course, the preselection option for all catalog movies remains available at all times. It will be appreciated that the automatic downloading of movies to all customer user stations can be readily achieved by the system operator simply communicating (e.g., daily) to all user stations the ID header information for that day's automatically downloaded movie or movies. The user station downloads movies to the intermediate storage in storage module 230 just as if the recording had been preselected by the customer. The graphical user interface alerts the customer that the recordings are available by a cue such as "YOU'VE GOT FLICKS".

#### Using Customer Preference Information

In a more customer-specific manner of carrying out the invention, different sets of movies are automatically downloaded at customer user stations according to the movie preferences of the customer. For

example, each customer may use the graphical user interface (see Figure 13) to select those movie types (e.g., romantic comedy, documentary, action) they most prefer. The system operator uses this information to  
5 tailor the automatic downloads to that customer's user station accordingly. In a simple application, the system operator may create, for example, five to ten standard customer profiles so that each customer receives automatic downloads for the one of those profiles which  
10 he most closely matches. The objective is for the storage module 230 to have available for on-demand viewing a large percentage of the movies that any particular customer may be interested in at any given time -- or at least have those movies available to the  
15 customer over a period of time as new entries into storage overwrite older entries, recognizing that at all times the customer is free to order any movie from the catalog.

As described above, the system operator may  
20 create, for example, five to ten typical customer profiles and assign each customer to one of these typical profiles according to movie preference information entered by the customer. Thereafter, the customer receives (e.g., daily) the automatically downloaded  
25 movies for his particular profile. However, in other embodiments of the invention, customer preference information may also be used in a more sophisticated fashion to a more detailed profile reflecting the individual tastes of a customer or the tastes of the  
30 customer household family members. To this end, the customer may use the graphical user interface (Figure 14) to enter movie preferences at a desired level of detail. As shown in Figure 14, a first level of detail is the selection of one or several types of movies (similar to  
35 the selection made in connection with Figure 13). In addition, the customer may go to a second step where each

-34-

selected type of movie may be further subdivided by, for example, favorite movie star(s), top ten movies this month, etc. Other means for subdividing interest areas under a particular type of movie may be used (e.g., World War II,). However the expression of movie preferences is made, this information may be used alone, or in conjunction with other information, to permit the customer's user station to download to memory (e.g., fifteen movie capacity) an ongoing, rolling selection of movies that will most likely match the preferences of the customer.

Referring to Figure 15, there is shown a block diagram that illustrates in schematic form the generation and use of customer preference information. Figure 15 shows portions of user station 228, namely, the download module 220 with receiver and the storage module 230 for movie storage. The optional recorder for permanently recording "library" movies (e.g., DVD burner) is also shown. As schematically shown between user station 228 and storage module 230, apparatus 310 serves to read the ID headers on all of the broadcast movies and select for downloading to module 230 only those that are indicated as being desirable to the customer by the processed movie preference information.

Figure 15 also shows portions of central controller 36 that store and analyze customer preference information and customer order information, and generate from that information the individualized "customer catalog" that determines which movies will be automatically downloaded at that customer's user station. To this end, controller 36 includes an individual customer preference information storage module 320, a general population cluster preference database 330 and a customer catalog generator module 340. Each customer's preference information is entered in the manner described above via the graphical user interface and is

-35-

communicated to module 220 by phone/modem. In addition, the preference information of the entire customer population (or some subset thereof), as well as order data, is stored in module 330. Information from modules 5 320 and 330 is analyzed to create an individual "customer catalog" for each customer via module 340. The individual customer catalog data is communicated to the user station in each customer household and serves to assure that those movies that best fit the preference 10 customer profile are the ones that are downloaded to storage module 230. While a first-in, first-out protocol may be used for overwriting onto the hard drive of module 230, the customer catalog information may serve to establish a different protocol that will overwrite the 15 less likely to be purchased movies ahead of those recordings which, by analysis at module 340, show more promise of being viewed by the customer. Certain new release movies in high demand within the customer's primary areas of interest may be designated to remain in 20 storage for a minimum period of time, say one week, regardless of the "traffic" through storage module 230.

Along with movies, there is blanket transmission of catalogs and other advertising or customer interest information. The storage and display 25 of this information may be based on customer profiles. For example, an advertisement for a new movie that is expected to appeal to young adults, Julia Robert fans, and customers living in a particular geographic area would have this information contained in its header, and 30 the receiver would recognize if any of its users are in any of these categories and will appropriately store or not store this advertisement on the hard drive, and may determine to display or not display this ad on the user's TV catalog. Similarly, advertisements for other related 35 merchandise, like "Star Wars" paraphernalia, might also

-36-

be displayed. Text describing individual movie stars or related events might also be stored with the catalog.

#### Promotion-Based Streaming

5               Figure 16 shows the use of promotion-based streaming to download movies at user stations 28 and 228. A content provider (e.g., movie distribution company) may decide to push a selected movie as a promotion. The system operator packages the advertisements and movie and  
10 then broadcasts them for automatic downloading by all customers or by a selected group of customers based on the broad profile information developed by the operator (Figure 15). The promotional movie is advertised to the customers through an advertisement that appears at the  
15 top of screens generated by the system, or by a flashing message such as, "YOU'VE GOT NEW FLICKS". Promotional movies are stored in storage module 230 until they are overwritten or deleted. As with the other means of providing movies for viewing, once the customer views the  
20 movie, the billing is consolidated in the customer's monthly statement. Promotional-based streaming may be accomplished typically in a relatively short period of time using appropriate bandwidth (e.g., one quarter transponder).

25               In applications of the invention where both movies and music are made available to customers, promotions may include movie soundtracks for movies that are being broadcast by DBS or cable. In this situation, prior to broadcast of the movie, the soundtrack is  
30 broadcast and automatically downloaded to all user stations. When the movie is broadcast, viewers of the movie are informed that the soundtrack for the very movie they are viewing is on their hard drive and available for immediate on-demand purchase. Purchases may be made  
35 during the movie by appropriate means; for example, a translucent icon may appear on the screen and purchase

made by simply clicking on the icon. Or, the purchase can simply be made at the conclusion of the movie where, preferably, viewers are reminded that the soundtrack is available on their hard drive for on-demand purchase.

5

Alternative Embodiments: User Station Including a "Companion Set-Top Box" That is Backwards Compatible With Standard Satellite and Cable TV Boxes (Figures 23 and 24)

10 User stations 28 and 228 described above are largely self-contained units, that, in combination with the blanket broadcasts and central controller 36 of the system operator, enable a system customer to enjoy the benefits of the present invention. However, in those situations where a household already has an appropriate  
15 satellite or cable TV receiver box 600, it may be desirable to provide an add-on or "companion" set-top box 610 (Figures 23 and 24) that connects to a bidirectional digital port of the existing box 600. In this situation, companion set-top box 610 augments the functions provided  
20 by the standard satellite or cable box 600 to allow downloading, recording, playback and billing for compressed and encrypted video and audio (movies and songs), as well as providing specific marketing and profiling functions. Companion box 610 receives  
25 encrypted content either directly from the existing satellite or cable box 600 as shown in Figure 23 or, using its own tuner (not shown), may directly connect to a satellite dish or cable in parallel with the customer's satellite or cable box 600. The customer's television 32  
30 is connected directly to companion box 610 and video and audio outputs from satellite or cable box 600 are merged in the companion box.

Companion box 610 interacts with the customer by displaying menus and choices to the customer on the  
35 screen of the connected TV 32 and responding to customer input via IR port 615 from a standard TV remote, allowing

-38-

a customer to call up menus, scroll through them and select material to be recorded or shown in the manner described above in connection with other embodiments. Additionally, companion box 610 may provide interactive  
5 TV capabilities that permit it to respond to a remote control input or a direct ordering device (DOD) input (also via port 615) that communicates a customer's identification and allows limited selection and ordering functions.

10 Internally companion box 610 contains a high capacity storage device, such as a hard disk drive 620, a read-write module 630 for reading and writing to removable media (e.g., a CD reader/writer), a decompression/decryption engine 640, a modem 650 to  
15 provide "slow" connection to the central system computer 36, and a microprocessor 660 capable of transferring digital streams among the other components as well as generating menus, conducting billing and profiling functions, and generally controlling the functions of  
20 companion box 610.

Hard disk drive 620 (preferably more than 10 gigabytes and most preferably in the range of 60-144 gigabytes, or more) has the capability to store multiple compressed movies and songs as well as billing, profiling  
25 and interactive advertising information. Although hard disk drive 620 may be large enough to act as a library of songs and movies, its main function is to store content from earlier broadcast downloads that have yet to be viewed directly from hard disk drive 620 or stored on  
30 removable media. This content includes songs and movies requested by the customer; songs, movies, information or advertising material that has been cached for later display to the customer; catalog information; and software upgrades for box 610. A portion of hard disk  
35 drive 620 may be allocated for advertising/information content that is matched to a customer profile. As



described above, profiles may be based upon prior customer selections and customer-indicated interests. Maintaining customer profile information in a specially allocated part of the hard disk drive 620 allows  
5 profiling to occur mainly at the level of box 610 rather than at the level of central controller system 36, and also allows the profile information to remain invisible to the customer. Preferably, customer-selected profile information may be adjusted or supplemented by  
10 communications from central controller system 36, such as by profiling, storing and integrating customer-specific advertisements into the video presentation.

A desirable feature of box 610 is the ability to store content on removable media, such as CD's and  
15 DVD's. As described above, removable media allows creation of customer libraries of movies and songs that can be replayed on the box 610 or on remote fixed or mobile players that may be owned by the customer, by an acquaintance or provided for use by the general public,  
20 such as a seat-back video player in an airplane. Content stored on the removable media preferably is compressed and encrypted so that content providers can be assured to receive proper payment for viewing or use of the content. In one embodiment, customers purchase a limited number of  
25 plays when they write a CD, and box 610 or other players register each playing of the content so that the number of plays can be limited to the purchased number of plays.

As described above, in order to efficiently use broadcast bandwidth and to fit an entire movie with good  
30 quality on the removable media, powerful compression of content is desirable. As with other embodiments previously discussed, compression is performed prior to blanket transmission of the content to efficiently use bandwidth, provide secure transmission of the content,  
35 and achieve highest quality of compression by using sophisticated compression algorithms, engines and human

judgment, when necessary. Decryption and decompression will be accomplished in box 610 (as well as in any other players) by a specialized algorithm or chipset.

Box 610 has the capability to communicate with  
5 central controller system 36 to conduct billing transactions (or simple extension of "credit" to the box), to receive scheduling, catalog or profiling information that is not received in digital form from the blanket broadcast, and to communicate other information  
10 such as customer profiles or registration information to central controller system 36. This communication may be accomplished through modem 650 that is connected to a standard POTS phone line, a DSL or ethernet port connected to a digital network or an internal cell phone.  
15 In the future, the communication may be possible by transmissions from box 610 to central controller system 36 via satellite. Similarly, where appropriate, box 610 may use the communication capabilities of the customer's satellite or cable box 600 to achieve connection with the  
20 central computer system.

Microprocessor 660 within box 610 conducts the data transfer and communication functions of the box. This includes directing or handling the content bit-streams in or out of hard disk drive 620, read/write  
25 media, or decompression engine, as well as communications with satellite or cable box 600, IR remotes or DOD's, and modem. Microprocessor 660 may also generate or direct the generation of the graphics required for customer selections or functions such as  
30 interactive advertisements. Directing both content and customer data in and out of hard disk drive 620 also is done by microprocessor 660. Interactions with the satellite or cable box 600 is also done by microprocessor 660 (for example, requesting box 600 to tune to a  
35 certain channel to receive a particular song or movie). As mentioned, in certain embodiments, microprocessor 660

-41-

may control a tuner for direct communication of transponder data into box 610.

A video controller 680 (Figure 23) functions to take the digital output from decompression engine 640, combine it with other video or graphics and convert the result into a conventional video signal. Video controller 680 also allows conventional video signals from satellite or cable box 600 to go directly to TV 32 when video from box 600 is being viewed. Video controller 680 may also place interactive video, such as a window of choice, information or video, into the normal picture. A request for an interactive video overlay or window comes from the customer via port 615.

As mentioned above, preferably box 610 also has software applications that allow interactive TV purchasing or information requests by system customers. A remote control or dedicated ordering device that identifies the customer through an internal identification number and/or a user-entered pin code allows ordering a variety of merchandise (other than transmitted movies and music) through box 610's IR port, processor and modem communication link. Such a device allows ordering a variety of merchandise (other than transmitted movies and music) both at the customer's own box 610 as well as at a remote box, for example, ordering and paying for a pizza while watching a football game at a friend's house. The remote control and/or dedicated ordering device also allow calling up interactive ads played through box 610.

As described above, removable media containing movie or music content, for example writeable CD's or DVD's, are created at box 610 for later playback on box 610. Additionally, these CD's or DVD's may be played at remote locations using mobile or mounted playback devices as shown schematically in Figure 25 and pictorially in Figures 26 and 27. CD's or DVD's may also be

-42-

commercially distributed, for example by stewardesses for playback on long airplane flights or by public libraries. The playback devices shown in Figures 25-27 are simple music or video players that include a reader mechanism 5 700 for the removable media (e.g., CD) on which the movie is recorded, a decompression/decryption engine 710, a color screen with speaker (or headphone jack) 720 and a controller 730. These playback devices present the media recorded on box 610, much like small, portable CD players 10 are used to listen to music today. In this case the material presented is primarily video and can serve as entertainment for adults or children during travel, for example, individual players with relatively small (e.g., four-inch to twelve-inch) screens on planes or in the 15 back seats of automobiles. These playback devices may also be used for educational purposes by allowing students to use inexpensive media to view lectures by professors. The playback devices differ from laptop computers since they are smaller and less expensive 20 without keyboards, batteries, hard disks or RAM. Furthermore, the playback devices are packaged to allow easy viewing and may be provided with specialized mounts to hold them at convenient viewing heights. The playback devices are not necessarily owned by an individual, but 25 may be made available for public use.

In preferred embodiments, the playback devices accommodate pay-per-play media, for example, a movie CD that has been purchased at a price that allows three plays, by either affecting media as it is viewed, for 30 example, by a laser mark that signifies one play has occurred, or by reading or marking a token, like a magnetic card, that accepts billing or accounting associated with each playing. In some embodiments, the token may be integrated into the CD, for example as a 35 magnetic strip that adheres to a surface of the CD. Similarly, a CD may be recorded with a limit date on

playback. For example, a CD may be purchased and written with a 24 hour limit on playback. In that case, the playback device contains a clock to assure the media is still within its purchase-to-play time. Other movies may  
5 be purchased with no restrictions on numbers of playings.

The security of the content on the removable media may be secured against unauthorized playback by a number of means. One means is encryption and a proprietary decompression algorithm such as ZISC  
10 (described below), requiring a specialized chip to accomplish real-time decoding. Another means is by using a specialized hardware reader incorporating a laser reader of a particular wavelength that is generally unavailable to the public. For example, a companion box  
15 610 and associated playback device may use blue lasers to record and playback on conventional CD's with much higher densities than possible with conventional 780 nm lasers. In this case, and as described in more detail below, by utilizing mostly mature, volume-produced conventional CD  
20 components, and only a few specialized parts such as the blue laser and a controller chip, costs are kept low while maintaining content security against unauthorized copying or playback.

As an alternative to mobile players that use  
25 removable media, a mobile player (Figure 28) may incorporate a small hard drive of perhaps 10 gigabyte capacity that can be loaded with movies and songs from companion set top box 610. Songs and movies are stored on the hard drive in the same encrypted, compressed  
30 format that is used for the removable media. Because hard drives are becoming smaller, the entire system with a hard drive can be made smaller than a mobile player having a removable media reader, and issues such as damage, loss or carrying CD's can be avoided. Typical  
35 uses of the mobile player of Figure 28 include loading several movies and songs for a long airplane trip, or for

-44-

the children for a car trip. A mobile player with a disk drive may or may not incorporate a removable media reader since loading the hard drive could be accomplished by an electrical connection such as through a USB port.

5

Alternative Embodiments: Transmission and Storage of Highly Compressed Video Files

As mentioned above, utilizing current  
10 technology, transmission of the video portion of a movie at standard VHS quality for MPEG 2 compression requires approximately 2.4 megabits/sec of bandwidth. A 100-minute movie stored at this compression requires a file size on the order of 1.3 to 1.8 gigabytes, typically  
15 about 1.6 gigabytes, which can be stored on various media discussed above, but which is too large for a one-sided compact disc (approximately 600 megabytes storage capacity) or a two-sided CD (approximately 1200 megabytes storage capacity). Preserving desirable (e.g., VHS  
20 quality) video playback for the consumer, while reducing these bandwidth and data storage requirements, is desirable, particularly if the movie file can be stored on a two-sided CD or, even more preferably, on a single-sided CD. (Preferably, current audio encoding/decoding  
25 technologies, such as those from MPEG, Microsoft, Liquid Audio or Dolby, can continue to be used for the audio portion of the movie.)

Several embodiments of video encoding, compression and processing that achieve the above goals  
30 will now be described with reference to Figures 17-22.

Video Encoding Utilizing Existing Codecs and An  
35 Upconverter (Figure 17)

IBM Corporation (France) has developed a digital video upconverter IC that performs real time upconversion of an incoming video stream and outputs a video pixel stream at up to 3 times the input rate, for the purpose of providing a high definition (HD) or near HD signal to an HD digital TV from a relatively low resolution input. As its primary advantage, this IBM upconverter permits broadcasters to provide HDTV-like services without using the precious bandwidth that would otherwise be required. The IBM upconverter uses a combination of functions to increase the number of lines, remove interlacing, enhance pixelization through spatial and temporal interpolation and increase the frame rate enabling users with high resolution television sets to view high definition video with low resolution input. The IBM upconverter IC is described at <http://www.fr.ibm.com/france/cdlav/video.htm>, included in the attached appendix. Other suitable upconverters may be used.

According to the present invention, upconversion technology is used in a new way for image enhancement of a low resolution, blanket transmitted video input stream (e.g., at 0.8 megabits/sec) so that it can be displayed at an apparently higher resolution (e.g., VHS) at the customer's television. Referring to Figure 17, the video portion of a movie is highly compressed using, for example, MPEG 2, MPEG 4 or DivX encoding to the lowest possible resolution that can be upconverted at the set top box to permit VHS quality viewing. In certain embodiments, this might be accomplished by shrinking a normal VHS picture from full-screen to quarter-screen size and then compressing the screen comprising a quarter-screen image with the rest of the screen black. The highly compressed, low resolution video is blanket transmitted to the consumer's set top box where conventional decoding hardware (MPEG 2, MPEG 4,

-46-

DivX) decodes the signal and an upconverter, preferably one employing three-dimensional spatial/temporal interpolation such as the IBM upconverter IC referred to above, increases the pixelization rate to a point where the quarter-screen video may be viewed by the consumer as a full-screen image. The compressed movie (video and audio) may be stored via a local hard drive for local temporary storage. It may also be stored via a CDR on a single-sided or double-sided CD prior to decoding and upconversion provided, as is in preferred embodiments, the total broadcast data will fit on a CD.

It will be appreciated that the above described techniques of Figure 17 not only permit blanket transmission of the movie file using less bandwidth and the ability to store an entire movie on a CD, but also protects the transmitted content by degrading it before transmission and then using specialized processing at the set top box -- a type of processing that is poorly handled on a PC and requires a specialized chip.

Video Encoding Utilizing Zero Instruction Set Computer (ZISC) Pattern Recognition on a Video-By-Video Basis (Figure 18)

Another development by IBM Corporation (France) is a zero instruction set computer (ZISC) that utilizes an hardware implementation of artificial neural networks for noise reduction and image enhancement of a gray scale digital still image. By way of summary, the ZISC chip set (e.g., IBM ZISC036) can recreate images from pattern recognition learning. The ZISC chip set can be taught the difference between original and a degraded image (degraded from high compression or additive noise) by processing samples of each (the higher number of samples, the better the processing ability and resulting images) and then recreate the original image from an extremely



poor quality or degraded image. A discussion of the ZISC technology can be found in "Noise Reduction and Image Enhancement Using a Hardware Implementation of Artificial Neural Networks", published in VI-DYNN'98-Virtual Intelligence-Dynamic Neural Networks-Stockholm, Sweden, 5 June 22-26, 1998, and in U.S. Patent Nos. 5,621,863; 5,701,397; 5,710,869; 5,717,832; 5,740,326 and 5,943,670, the contents of which are incorporated herein by reference.

10 In accordance with the invention, and with reference to Figure 18, a highly compressed version of the video (e.g., the video portion of a DVD movie) is created at encoder 502 with a compression method such as MPEG 2, MPEG 4 or DivX at the lowest resolution possible  
15 that will result in VHS quality output at the consumer's set top box (STB). This highly compressed, low resolution video is stored in database 504, along with audio that is encoded using standard encoding/decoding technology as identified above. In certain embodiments  
20 of the invention, a 100 to 120 minute movie may be compressed in this manner to a file on the order of 500 to 600 megabytes or less, a file that can be stored on a single-sided CD, or alternatively, to about 1100 megabytes for storage on a two-sided CD.

25 In parallel, utilizing the zero instruction set computer's pattern recognition capabilities, the video portion of the DVD movie is sampled frame by frame at 510. Each sample takes the form of a recognizable pattern that may be, for example, an 8 pixel by 8 pixel  
30 pattern that can be stored in 64 bytes. The number of samples per frame is at or near the number to effectively recreate the frame at VHS quality, for example, sampling about 1000 to 2000 samples per frame. As each frame is sampled, optimal patterns are stored. Optimal patterns  
35 are those permitting maximal enhancement of the video images that will be degraded by resolution reduction or

-48-

additive noise prior to transmission. A typical movie has less than 300,000 frames to sample. The resulting database will be substantially less than 600,000,000 samples because so many of the samples can be reused.

- 5 All of the resulting samples are stored as a digital neural archive (DNA) pattern library. Preferably, the patterns undergo comparison and consolidation at 512 and frame type categorization (described below) at 514.

Once the frame patterns have been created and  
10 stored in the DNA library, the library of patterns is packaged up at 504 with the highly compressed version of the video, and with the encoded audio. For transmission, the entire contents of database 504 is sent. The DNA library of patterns for the movie can be  
15 sent and buffered first, followed by the highly compressed video content. Once the patterns are received at the customer's set top box, they are cached in memory for image enhancement to the video. The video content can be streamed in or stored for later playing. When the  
20 video is played, it is first decoded using a standard video decoding method (MPEG 2, MPEG 4, DivX) and then sent to the ZISC processor for enhancement with the pattern database. Thereafter, optionally, but preferably, the resulting images are sent directly to an  
25 upconverter to increase the pixelization rate, as described above in connection with Figure 17.

It will be appreciated that for archiving and storage, the system only needs to store the patterns, along with the highly compressed video file (and the  
30 encoded audio). In certain preferred embodiments of the invention, the entire movie, video and audio, and DNA library can be stored on a single-sided CD. Thus, in accordance with this aspect of the invention, the set top box may include a hard drive or other suitable memory  
35 device for local temporary storage, as well as a CD recordable device (CDR) for recording movies onto one-

sided (or, less preferably, two-sided) CD's for long-term movie storage and archiving.

Video Encoding Utilizing ZISC Pattern Recognition for Any  
5 Video Source (Figure 19)

Once a substantial number of videos have been successfully learned through pattern recognition methods described above, eventually there will be enough patterns in the DNA library that the library may be used to  
10 enhance virtually any type of video. Once this is accomplished, the DNA library becomes a database that no longer needs to be attached to the video file, but can be stored on remote devices (for example, on disc or ROM) for movie enhancement purposes. Thus, as shown in Figure  
15 19, the customer's set top box can include a stored universal DNA library so that the transmitted movies need not be accompanied by their own pattern library information. In this regard, the universal library may include libraries for various video types, for example,  
20 broadcast sports, old black-and-white movies, animation movies, or other broad color palette video types.

Referring to Figure 21, it will be appreciated that patterns can be grouped in the DNA pattern library by frame type. Grouping in this manner enables the  
25 library to be further categorized and to reduced access speed to the library by the ZISC processor.

Referring to Figure 22, it will also be appreciated that as a video file is being scanned, the specific frame types may be noted and stored in the DNA  
30 pattern library. The library pattern groups are grouped by the most likely patterns to be used for a given frame type in the video. The goal is to reduce the number of patterns and to group them to the point that they can be stored and read as needed from the ZISC processor.

35 Thus, the ZISC-enabled compression technology described above relies on a DNA library of small image

-50-

types (for example, 8 by 8 pixels) to decode. The library is valuable because:

1. It provides extra security, especially if the library is communicated separate from the media and stored in the set top box.

2. It may allow a higher level of compression of the media so the compressed video with or without its respective library information can be stored on a single CD.

3. It may provide extra security by requiring a hardware chip whose functions cannot be run quickly on a PC type processor.

#### Video Encryption Utilizing ZISC Noise Reduction (Figure 20)

The embodiment of Figure 18 can be further enhanced by adding noise to the transmitted video as a type of copy protection, with the noise being capable of removal by the ZISC processor. This noise is added based upon the premise that, at some point, the quality of the transmitted video content is so poor that it is not worth duplicating or copying the digital source. In preferred embodiments (Figure 20), a uniform pattern of noise is added to each frame of the movie. To enable the best enhancement by the ZISC processor at the set top box, preferably care is taken to restrict the character and the location of the noise to specific areas of the video frames so that noise reduction and removal by the ZISC processor is optimized. (Obviously, noise will not be used to distort the transmitted DNA library.) Coordination between noise distribution and initial pattern recognition points assure that the associated category pixels of the degraded video are not changed by added noise. Another benefit to adding the noise in the form of uniform noise from frame to frame is the

-51-

additional compression ratios that can be achieved due to identical pixels throughout the entire video.

Alternative Embodiments: Use of Multilevel (ML) Optical  
5 Disk Technology for Local Movie Storage and Archiving to  
Enhance Disk Storage Capacity and to Enhance Security  
Protection of Recorded Content

One desirable feature of various embodiments of the invention that are illustrated in Figures 1-4, 11,  
10 17-20 and 23-24, is the provision of a local (i.e., at the customer household) means for recording content onto a recordable medium for movie (and/or music) storage and archiving. One preferred read/write system for accomplishing this function may take the form of a  
15 read/write system employing multilevel (ML) CD recording and playback technology developed and commercialized by the ML Alliance, comprising Calimetrix, Inc. of Alameda, California, USA; TDK; Mitsubishi Chemical; and Plextor. The ML technology is described in U.S. Patent Nos.  
20 5,235,587; 5,818,806; 5,854,779; 6,115,348; 6,148,428; and 6,150,964 and IDC White Paper entitled "Calimetrix' Multilevel Technology Enables Higher-Performance CD/DVD Recorders", IDC, Framingham, Massachusetts, USA (2000), all of which are incorporated by reference herein in  
25 their entirety.

The ML optical disk has the same geometry and pit spacing as a conventional CD, but achieves approximately three times the storage capacity as a CD by allowing each pit (or "data cell") to communicate three  
30 bits of information by means of variations in the intensity of reflected light. By being the same size and tolerances as conventional CD's, the manufacturing and pressing costs of the ML disk are similar to the low costs of a conventional CD. ML disks are superior  
35 storage media to CD's since their 2 gigabyte capacity as compared to 0.65 gigabytes allows storage of a full-

length movie with VHS quality via commercially available video compression techniques such as MPEG-2, MPEG-4 or other proprietary compression techniques such as those developed and used by Sorenson Media, without the complexity of multiple disks with attendant user issues and possible pauses as disks are changed. In the audio mode, the 2 gigabyte ML disk allows the equivalent of 30 record albums to be stored on a single disk in compressed mode. This level of storage allows extensive music libraries to be transported and played without issues of reliability, size and cost for CD changers as are found in the trunks of many automobiles today.

Readers for ML disks are mechanically identical to CD readers since ML disks and CD's share the same track and pit geometry, and can be read with the same lasers and photodetectors. Thus ML readers can be brought to market quickly for low cost by well developed CD reader manufacturing companies. Likewise, ML writers can produce disks that can be read like a standard CD and a standard CD can be played on a ML reader. Obviously, a maximum of approximately 0.65 gigabytes of information can be written to or read from a standard CD. The ability to read and write standard CD's is valuable because it allows the user stations or "set-top boxes" of the present invention to produce CD's that the customer can use with their existing fixed or portable CD players. An ML disk may be written in the conventional CD format if a system customer chooses to buy music or video rather than just "pay-per-play".

Readers and writers for ML players require signal processing electronics that is both more advanced and proprietary, allowing the ML disk system to be more secure than conventional music and video recording systems. At the first level of security, ML disk gray-scales are unreadable by conventional CD or computer readers, since these devices output just one bit per pit,

and signal processing is required to interpolate the gray scales of pit reflectance into three-bit digital data. The signal processing is accomplished in a reader by an ASIC (application specific integrated circuit) employing  
5 proprietary methods of calibrating the signal as well as the use of proprietary codes to minimize bit errors due to occasional errors in differentiating between adjacent grays such as described in U.S. Patent 6,148,428, "Method and apparatus for Modulation Encoding Data for Storage on  
10 a Multi-Level Optical Recording Medium". The proprietary ASIC converts the analog photodetector output to a 3-bit or more digital signal based upon calibration data that is included in each frame of data. The ASIC chipset also implements the error reduction techniques as described in  
15 the '428 patent. This chipset also can be designed to block the outputting of data frames that contain specific header information. Thus, ASIC's may be produced for different applications that reliably protect information. For example, the ASIC used in an ML reader/writer for  
20 computer use may be designed so that it will refuse to output data from any frame containing the bit combination "M" or "V". ASIC's used with the user stations/set-top boxes of the present invention may have an ASIC that only outputs frames with an "M" or "V" in the frame header.  
25 Thus, to read the music or video from an ML disk with any reader but a chip specifically designed for such a user station/set-top box would require a complex ASIC that would be both difficult and illegal to produce.

As mentioned above, ML technology provides a 3X  
30 improvement in CD storage capacity using existing optics, mechanics and manufacturing infrastructure, while also offering write speeds at 3X current CD write speeds, for example, write speeds of 36X to 60X, and above. Additionally, the ASIC chipset for writing and reading  
35 ML-encoded disks provides backwards compatibility with legacy CD's. Thus, in certain preferred embodiments of

-54-

the present invention, a read/write system employing ML technology may be made even more versatile by providing an additional write capability that permits writing conventional CD's (0.65 gigabytes) so that the read/write system can write CD's readable by any conventional CD player, in addition to writing proprietary ML disks.

As described in detail elsewhere herein, security of the recorded content is of utmost importance to the system operator and the content providers. By owning and controlling the broadcast end-to-end, the system operator has a unique advantage to implement any number of security measures. Using proprietary ML technology and a unique ASIC chipset designed specifically for the system operator, the security measures available for the recorded content may include:

4. Digital rights management via a standardized software protocol such as offered by InterTrust Technology Corporation of Santa Clara, California, USA;
5. Watermarking;
6. Custom tailored compression technologies;
7. Encryption;
8. Pattern recognition learning via artificial neural network technology (e.g., ZISC);
9. ML proprietary technology;
10. Unique ASIC chipset for implementing the ML technology for the system operator.

It will be appreciated that the enhanced storage capacity and write speeds associated with ML technology increase the attractiveness of producing standard or custom video or music CD's for system customers at CD recording "farms". CD's so produced at customer request are physically delivered to the customer for addition to their video and/or music archives. As mentioned above, a full-length movie may be stored on a



-55-

single ML CD, as well as approximately 30 compressed record albums on a single ML CD. Furthermore, as described in the ML technology literature identified above, ML technology may be extended in the future to DVD media to increase DVD storage capacity and write speeds by 3X or more. ML DVD technology may be used in accordance with the invention when available.

Alternative Embodiments: Increasing "CD" Data Storage Capacity By Storing Video and Audio Files on CD's Read by Short Wavelength Lasers (i.e., 620 nm and below)

As discussed elsewhere herein, in certain applications of the invention it is desirable to place VHS-quality (or better) movies on robust, inexpensive, storage media that can be stored in a "video library" for playback on a set top box or on a simple, mobile video playback station, for example, a unit having a four-inch to twelve-inch color screen that can be used by children traveling in a car on a family vacation. In these embodiments, the storage media should be physically robust to survive vigorous handling, and inexpensive to encourage users to create a large library that is frequently used. Writable CD's that now cost on the order of \$0.20 or less per CD provide the low-cost, ruggedness, and long life that meet library needs. Additionally, CD readers and writers are a mature technology and relatively inexpensive due to the use of CDs for both music and consumer computers.

Fitting an entire movie on a single CD using conventional compression algorithms requires accepting slightly sub-VHS video quality. A two-hour, VHS-quality video stream is about 35 gigabytes (320 by 240 pixels per frame, 60 frames per second, 7200 seconds) of information. Using a conventional MPEG-2 encoder/decoder running at 2 to 4 megabits per second, several 650 megabyte CD's are required to store a single movie. With

-56-

an MPEG-4 compression codec, a 95 minute movie can be encoded in 850 Mbytes with slight reductions in video quality such as slightly reduced color depth, slight splotching of colors in large areas of uniform color, loss of details in some objects (like a face in a crowd of people), slight jerkiness in slow pans and occasional dropped frames in action scenes. Furthermore, with this sort of compression, even a fast computer like a 900 MHz Pentium computer sometimes saturates and must drop frames during decoding. Similarly, a more advanced contemporary compression algorithm, tuned by experienced compression operators, allows a 95 minute movie (with audio) to be stored in 630 megabytes on a conventional CD, although the quality is noticeably below that of conventional VHS tape.

Multi-layer or two-sided CD's allow sufficient storage capacity for a two-hour movie using current compression techniques. However, the higher cost of the CD's and writers of these low-volume technologies lessens their appropriateness to the present invention's low-cost library application.

As is known to those skilled in the art, the amount of information that can be stored on a single-sided, single-layer CD is limited by the size of the diffraction pattern of light from the laser and optics used to read the disk. Spot size is defined as the half-intensity diameter of the Airy diffraction pattern (see Principles of Digital Audio, 4th edition, by Ken Pohlmann, published by Howard W. Sams and Co., 1985) where spot diameter,  $d = (0.61) \times (\text{light wavelength} / \text{numerical aperture})$ . In conventional CD players, the numerical aperture is 0.45. Larger values of numerical aperture require tighter positional tolerances including depth of focus, skew tolerance and disk thickness. Only small (less than 30%) increases in numerical aperture are technically feasible since tolerance requirements scale

-57-

to the second through fourth power of numerical aperture. Increasing the numerical aperture from 0.45 to 0.60 result in higher costs of disks and readers and a less robust playback system.

5           On the other hand, the technology of blue and other short-wavelength lasers (i.e., below about 530 nm wavelength) is rapidly evolving using materials such as indium gallium nitride that have wider band gaps. Currently, 3 to 5 mW blue lasers are available, and 10 mW  
10   lasers below 530 nm are under development. According to the invention, these lasers are cost-effective for writing conventional CDs. By way of comparison, current CD readers for music and computers use 780 nanometer lasers and 0.45 numerical apertures for spot sizes of  
15   1.06 micrometers ( $\mu\text{m}$ ) resulting in pit/land lengths of 0.83 micrometers and track pitches of 1.6  $\mu\text{m}$ . By using short wavelength lasers, for example 410 nm, and optics with 0.45 numerical aperture the information capacity of a CD nearly quadruples as spot size becomes 0.56  $\mu\text{m}$   
20   allowing pit/land lengths of 0.43  $\mu\text{m}$  and track pitches of 0.84  $\mu\text{m}$ . Furthermore, because data may be conventionally stored as a single helical track with conventional feedback-based radial positioning and servo controlled disk rotation rate, the technology and mechanisms used to  
25   produce today's low-cost CD readers and writers easily adapt to the higher densities. Thus, a single-sided, single-layer CD may hold 2.3 gigabytes of data when read with a 410 nm laser and detector. This allows conventional inexpensive CD's to hold a two-hour movie  
30   with VHS quality playback using conventional compression algorithms and decoding chips that are currently available. A description of short wavelength laser diodes is contained in U.S. Patent No. 5,912,477, incorporated herein by reference in its entirety.

35           As another approach, conventional CD's of the CR-RW type may be provided with higher capacity by

-58-

forming smaller pits that are spaced closer together using 620nm rather than 780nm lasers. Using the same optics with this shorter wavelength light, hence the same numerical aperture, and the same track pitches, this  
5 allows approximately 26% more data to be stored on the CD. Manufacturing tolerances established for CD's, such as hole concentricity, make it less desirable to reduce the track pitch, however, improvements in the error correction coding scheme may allow still closer pit  
10 spacing and higher densities. The use of this 620nm read/write system permits storage of 880 Mbytes or more per CD in a proprietary format that is not conveniently readable by standard CD or DVD readers. Thus, this system, coupled with the video distribution  
15 system operator's control of broadcast and encoding/decoding parameters, provides the structure for security of transmitted content that is required by the content providers.

It will also be appreciated that the storage  
20 medium may be in the form of a multiple layer CD-like medium that is read and written to by multiple light sources of different wave lengths. In this embodiment, the medium may include a first data storage layer that is read and written to by a longer wavelength light source,  
25 for example 620 nm, overlaid by a second data storage layer that is read and written to by a shorter wavelength light source, for example, 410nm, with a light filter in between that blocks light having wavelength less than about 620nm. This system accomplishes the goal of  
30 providing an information storage capacity that is well above that of a conventional CD, and the ability to secure the transmitted content through a proprietary system.

Alternately, DVD or another read/write  
35 technology, when made sufficiently robust and inexpensive, can be used as the storage media for the

invention's system of video distribution, library storage and playback when coupled with sufficient security measures.

5    Ensuring Flawless Movie Recordings Using Checksums and Multiple Downloads

          Satellite receivers do not have perfect reception due to the tradeoff between electrical power and bandwidth of the satellite. Weather conditions, motion of atmosphere layers or obstructions between the dish and the satellite may interrupt the signal. A momentary loss of bits will cause a video image to freeze for a frame or two, while longer interruptions will cause reception to blank. Whereas a short loss in video is a couple of frozen frames, data loss in audio may leave a glaring blank. Therefore, a satellite system for transmission of movies and/or music preferably should include a method to detect and fix data losses at the receiver.

20           Patching data "potholes" requires a method for sensing potholes and another for placing "asphalt" to fill them. Typically, digital data is sent in packets of bits (perhaps one thousand bits at a time with each packet containing 1/40 second of music). Loss of bits within a packet can be detected by error codes or merely a "checksum" at the end of the packet which indicates the sum of all the sent bits. Each packet may have an identifying number so that loss of an entire packet is noticed. This is all conventional Internet technology.

30           Repairing data loss might be accomplished by replacing an occasional packet by the receiver asking for a copy of the packet via an Internet or modem phone connection. However, the frequency of data loss and amount of contiguous data might be lost (for instance, during a rainstorm), requires a wider bandwidth, like the satellite, to provide the material to repair data loss.

Therefore, in certain embodiments, the present invention provides the capability in the system to detect bit losses and receive a second copy of the selection and use all or part of that copy to patch the missing or corrupted bits or packets in the original download. This would require storing a requested download on the storage medium (e.g., hard drive), checking for missing data, informing the customer that the download was imperfect, then receiving and storing all or part of a second (or rarely a third) transmission, and then selecting good packets of bits to make up the final copy.

In practice, a customer selects a movie or music selection via the TV-remote interface and the TV screen notes a download, say, 45 minutes later. As soon as the download is completed, the customer is informed of the quality of the download (A, B, C, D) and informed of the time of the next transmission of the material. The customer has the option of viewing the less-than-perfect movie, or even burn a CD if they wish. Or the customer can wait for a better version.

While the present invention has been described in connection with certain illustrated embodiments, it will be appreciated that modifications may be made without departing from the true spirit and scope of the invention. For example, the term "video display device" has been used herein in its broadest sense to refer to any suitable video imaging system, such as a television, computer monitor, plasma screen, LED display, liquid crystal display, 3D imaging system, or the like, understanding that an appropriate audio capability is provided. Also, while a DVD RAM platter system has been described as one preferred recording and playback device, both at real time and time-compressed transmission speeds and write speeds to the discs, other systems may be used, alone or in combination, such as magneto-optical disc, digital tape, VHS tape, a central or auxiliary server

(optical, magnetic or magneto-optical). The discrete storage media of any one of these alternative devices may be arranged in a platter or stack or other suitable format to provide the user access to multiple stored

5 audio/video content stored thereon. These and other modifications are deemed to be within the true spirit and scope of the invention.

That Which is Claimed

1. A method of distributing movies to customer households comprising the steps of:

- 5 blanket transmitting a plurality of movies to customer households in compressed digital form at faster than real time transmission rates;
- permitting a plurality of customer households to record desired movies in compressed digital
- 10 form on a high capacity storage medium;
- permitting a plurality of customer households to play back for viewing from the high capacity storage medium a recorded movie;
- communicating movie playback information
- 15 from customer households to a central controller system with respect to movies that are actually played back from the high capacity storage medium for viewing;
- billing customer households for those recorded movies that are actually played back from the
- 20 high capacity storage medium for viewing;
- permitting customer households to create copies of movies recorded on the high capacity storage medium on removable media to serve as library or remote play copies; and
- 25 billing customer households for the privilege of playing back for viewing movies that have been recorded on the removable media.

2. The method of claim 1 wherein the removable media on which library or remote play copies are made are selected from the group consisting of CD's and DVD's.

30

3. The method of claim 1 wherein the removable media on which library or remote play copies are made are CD's that are read by a laser having a

35 wavelength shorter than about 530 nm.

4. The method of claim 3 wherein the laser



wavelength is on the order of 410 nm.

5. The method of claim 3 wherein the laser is formed using a wide band gap material.

6. The method of claim 1 wherein the step of  
5 creating copies of movies recorded on the high capacity storage medium on removable media is carried out in a companion set-top box that is connected to a satellite or cable TV receiver box.

7. The method of claim 1 wherein the step of  
10 blanket transmitting is carried out by direct broadcast satellite transmission.

8. The method of claim 1 wherein the removable media on which library or remote play copies are made are selected from the group consisting of  
15 multilevel (ML) CD's and multilevel (ML) DVD's.

9. The method of claim 8 including the step of enhancing security of the recorded movies by utilizing a reader that requires a proprietary ASIC chipset that is specifically designed to convert the analog photodetector  
20 output of the reader to a binary bit stream.

10. A system for distributing movies to customer households comprising:

a data transmission system blanket transmitting a plurality of movies to customer households  
25 in compressed digital form at faster than real time transmission rates;

a user station at each of a plurality of customer households, the user station including:

means permitting the customer  
30 household to preselect desired transmitted movies for recording;

a receiver and associated high capacity storage medium for recording movies in compressed digital form;

35 a playback device for playing back from the high capacity storage medium those recorded

-64-

movies that the customer household desires to view;

a central controller system having a database for storing therein an address corresponding to each customer household;

5 a communications link between customer households and the central controller system to verify to the central controller system that a recorded movie has been played back from the high capacity storage medium for viewing;

10 a removable media read/write device for creating copies of movies recorded on the hard drive on removable media to serve as library or remote play copies;

a billing system associated with the  
15 central controller system to bill customer households for those recorded movies that are played back from the high capacity storage medium for viewing and for billing customer households for the privilege of playing back movies that have been recorded on the removable media.

20 11. The system of claim 10 wherein the removable media read/write device is a CD read/write device.

12. The system of claim 11 wherein the CD read/write device includes a laser reader having a  
25 wavelength less than about 530 nm.

13. The system of claim 12 wherein the laser wavelength is on the order of 410 nm.

14. The system of claim 12 wherein the laser is formed using a wide band gap material.

30 15. The system of claim 10 wherein the removable media read/write device is a DVD read/write device.

16. The system of claim 10 wherein the removable media read/write device is contained in a  
35 companion set-top box that is connected to a satellite or cable TV receiver box.

17. The system of claim 10 wherein the removable media read/write device is a multilevel (ML) CD read/write device.

18. The system of claim 10 wherein the  
5 removable media read/write device is a multilevel (ML) DVD read/write device.

19. A method of distributing movies to customer households comprising the steps of:

blanket transmitting a plurality of movies  
10 to customer households in a digital, highly compressed, low resolution form that cannot be played back with acceptable resolution after conventional decoding;

permitting each customer household to  
preselect and record desired movies in the highly  
15 compressed form in which they are transmitted;

decoding those movies that the customer household wishes to view with conventional decoding, followed by image enhancement to increase the resolution of the movie to acceptable resolution;

20 permitting each customer household to play back for viewing any recorded movies that the customer household wishes to view;

communicating movie playback information from each customer household to a central controller  
25 system; and

billing customer households for those recorded movies that are actually played back for viewing.

20. The method of claim 19 wherein the step of  
30 blanket transmitting is carried out by direct broadcast satellite transmission.

21. The method of claim 19 wherein image enhancement is achieved by upconverting to increase the pixelization rate.

35 22. The method of claim 21 wherein the upconversion is performed by three-dimensional

-66-

spatial/temporal interpolation that performs real time de-interlacing and frame rate upconversion.

23. The method of claim 19 wherein image enhancement is achieved by artificial neural processing  
5 incorporating pattern learning.

24. The method of claim 23 wherein the artificial neural processing is facilitated by zero instruction set computing.

25. The method of claim 23 including the step  
10 of employing a digital neural archive pattern library for each movie and blanket transmitting the pattern library along with the movie.

26. The method of claim 23 including the step of employing a universal digital neural archive pattern  
15 library that is stored at the user stations.

27. The method of claim 23 including the step of adding noise to the video portion of the transmitted movies as copy protection encryption and removing the noise at the user station utilizing the artificial neural  
20 processing image enhancement step.

28. The method of claim 27 wherein the noise is added as uniform patterns of noise to all or selected frames of the movies.

29. The method of claim 19 wherein image  
25 enhancement is achieved by artificial neural processing incorporating pattern learning followed by upconversion to increase the pixelization rate.

30. A system for distributing movies to customer households, comprising:

30 a digital data transmission system blanket transmitting a plurality of movies to customer households in a digital, highly compressed, low resolution that cannot be played back with acceptable resolution after conventional decoding;

35 a user station at each customer household, the user station including means permitting the customer

-67-

household to preselect desired transmitted movies for recording;

5 a receiver and associated digital recording device at each customer household for recording movies in the highly compressed, low resolution form in which they are transmitted;

a decoder for conventionally decoding those movies that the customer household wishes to view;

10 an image enhancer for increasing the resolution of the conventionally decoded movie to acceptable resolution;

a playback device at each customer household for playing back those recorded movies that the customer household desires to view;

15 a central controller system having a database for storing therein an address corresponding to each customer household;

20 a communications link between each customer household and the central controller system to verify to the controller system that a recorded movie has been played back for viewing; and

25 a billing system associated with the central controller system to bill customer households for only those recorded movies that are played back for viewing.

31. The system of claim 30 wherein said image enhancer comprises an upconverter that utilizes three-dimensional spatial/temporal interpolation to perform real time de-interlacing and frame rate upconversion.


30 32. The system of claim 30 wherein said image enhancer comprises a hardware implementation of artificial neural networks.

33. The system of claim 32 including a zero instruction set computer.


35 34. A method of distributing movies to customer households substantially as shown and described.

35. A system for distributing movies to customer households substantially as shown and described.

1/23

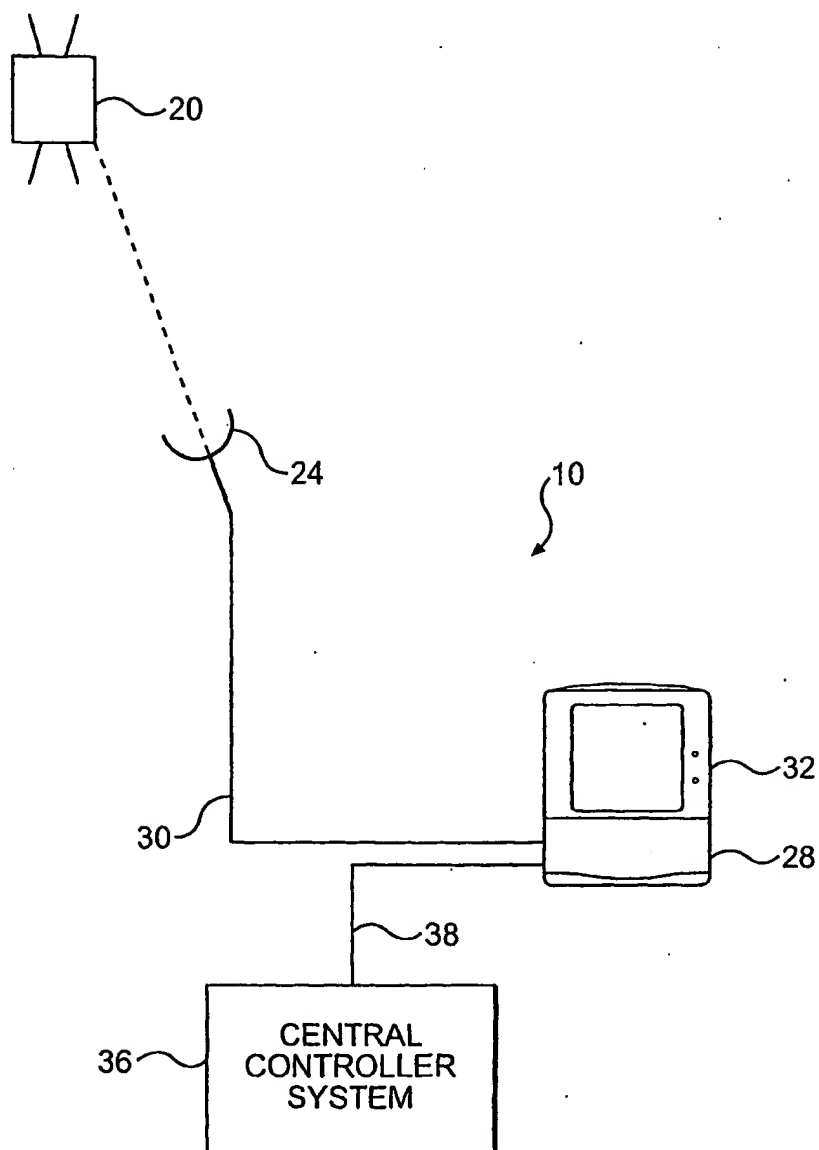**FIG. 1**

2/23

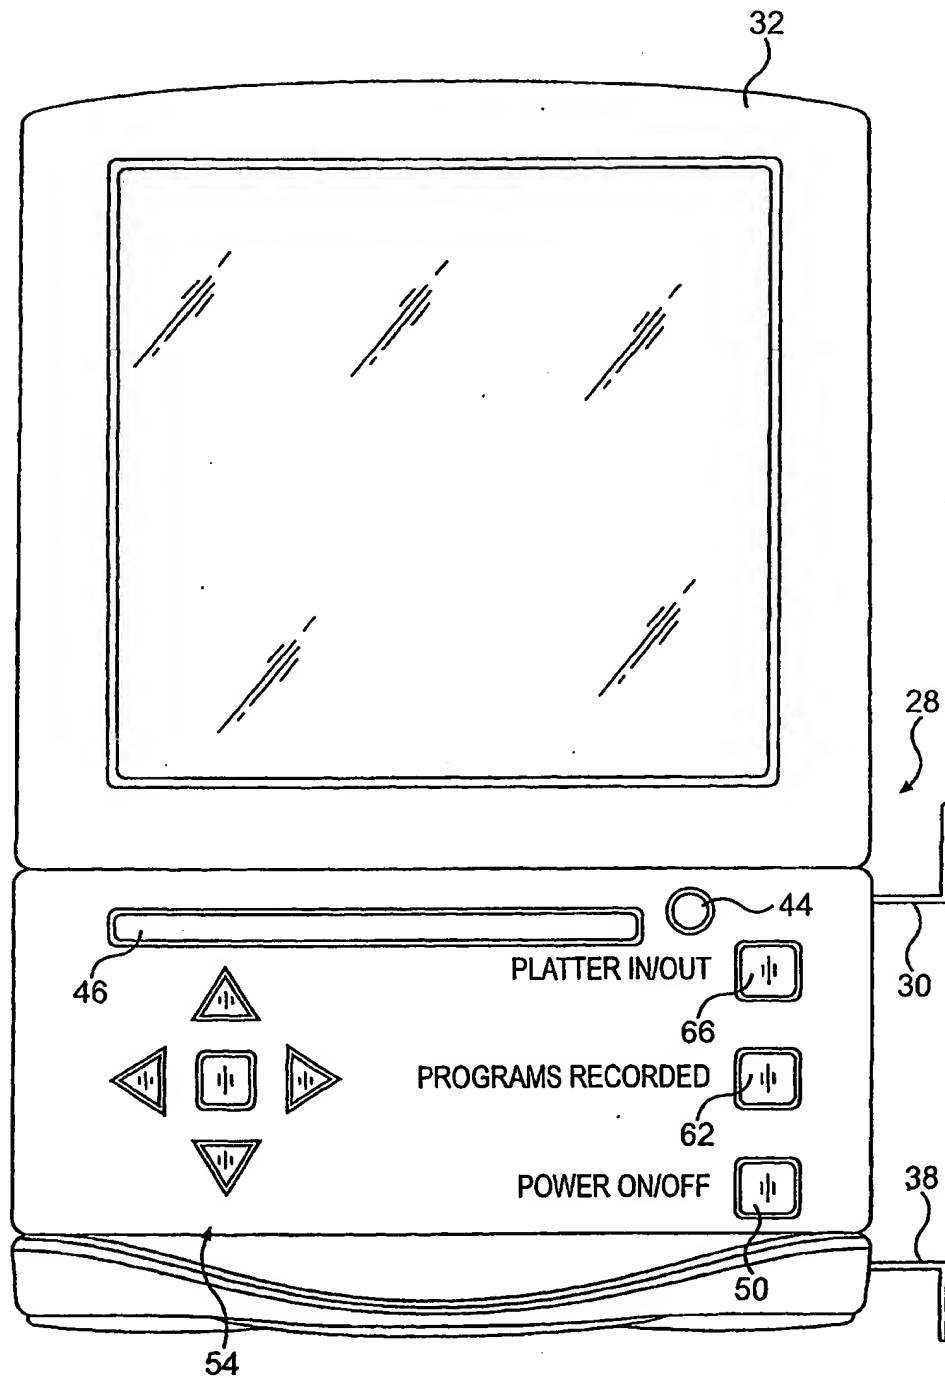


**FIG. 2**


SUBSTITUTE SHEET (RULE 26)



3/23

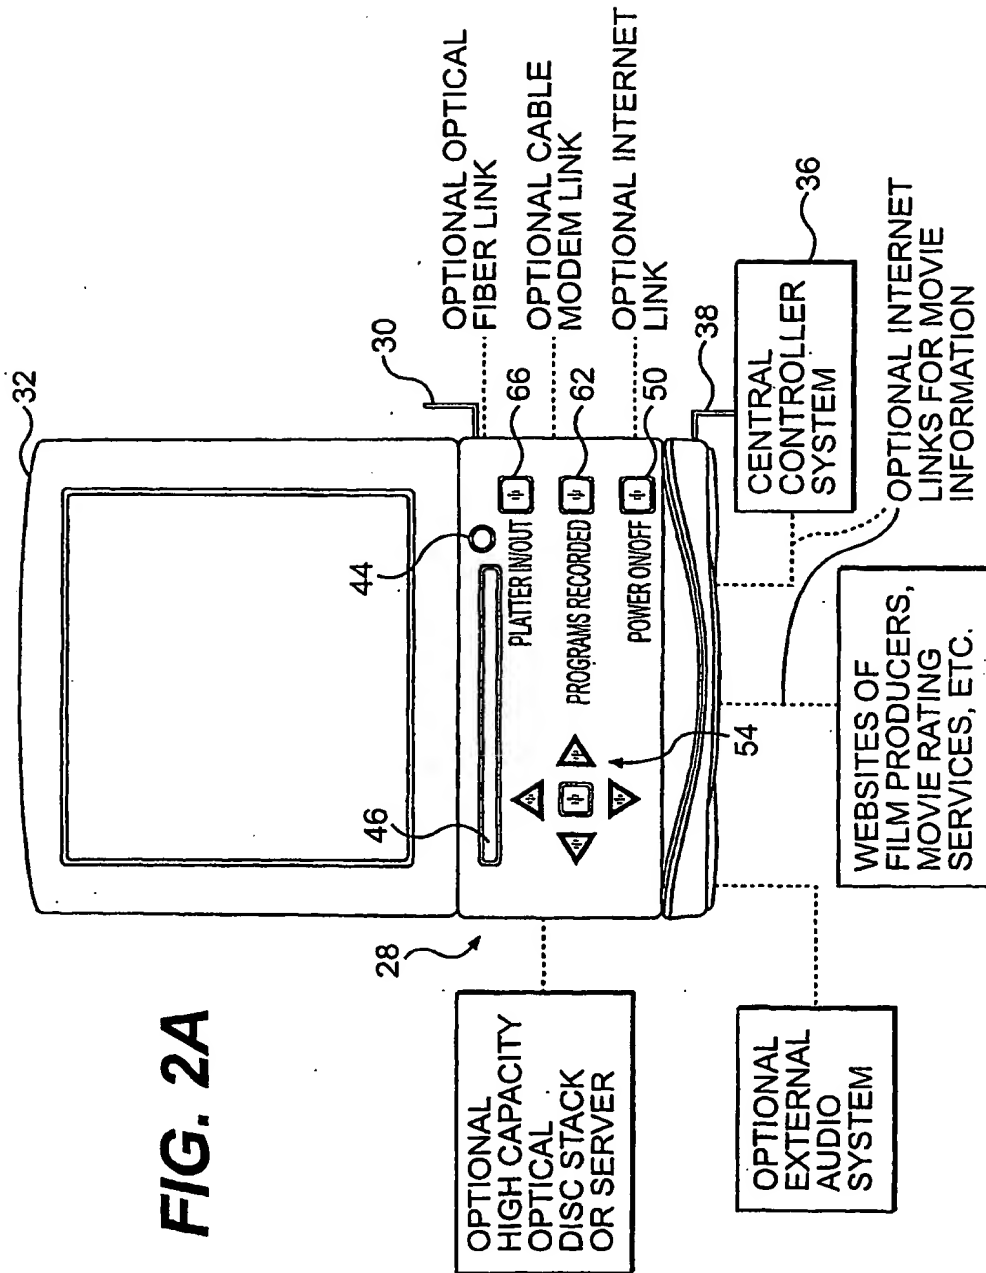


4/23

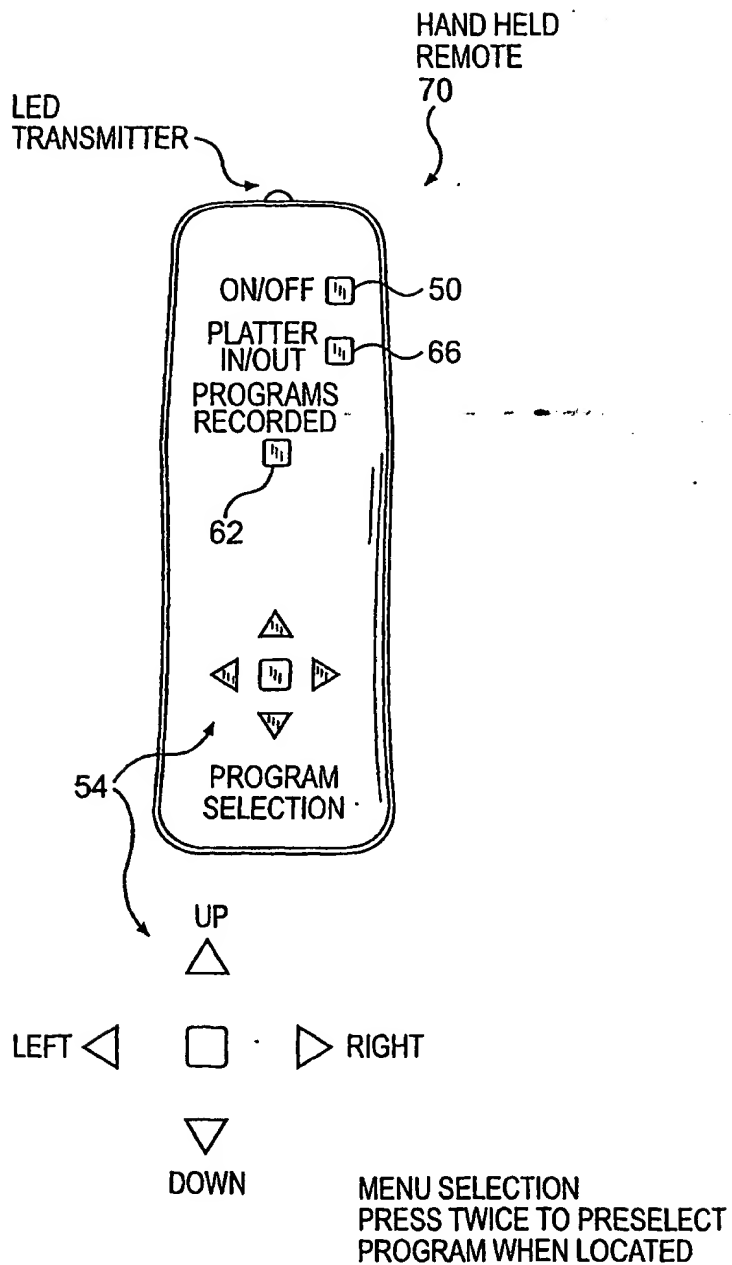

**FIG. 3**

SUBSTITUTE SHEET (RULE 26)

5/23

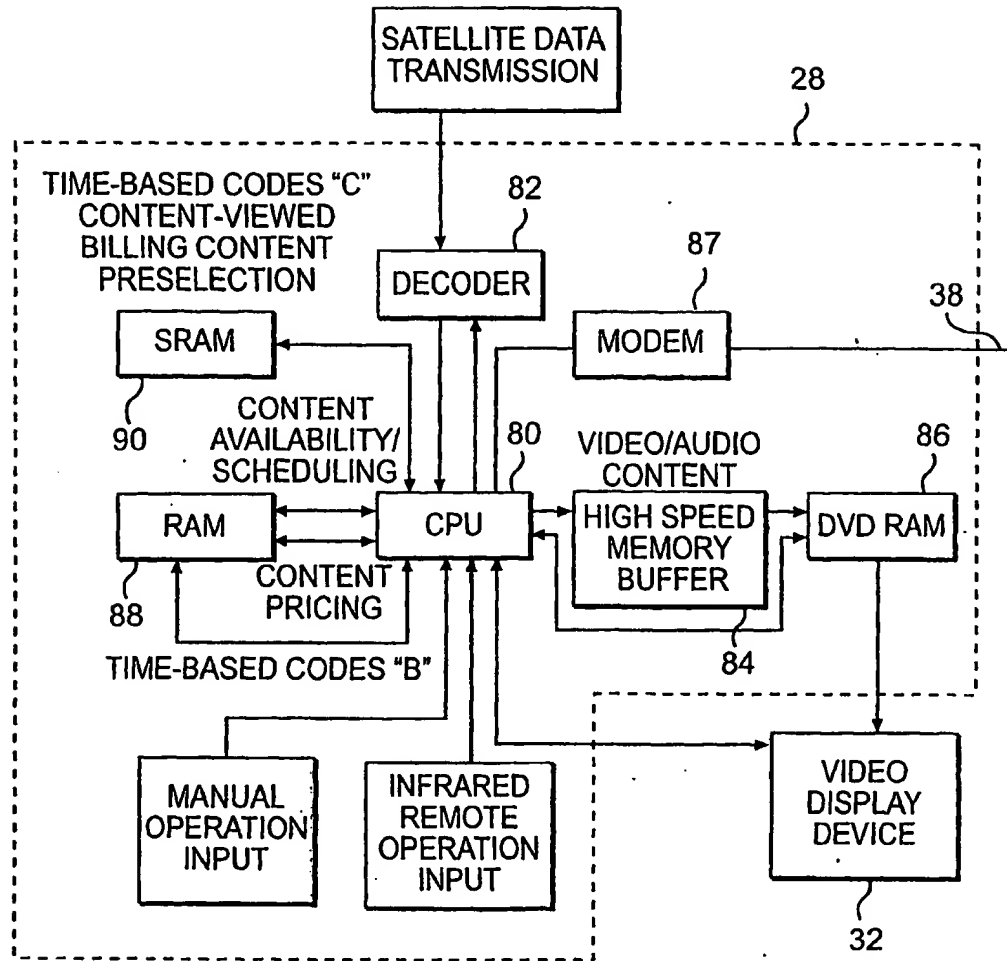**FIG. 4**

6/23

☐ PROGRAMS RECORDED  
☐ AVAILABLE MOVIES  
   1. NEW RELEASES  
     ☐ COMEDY  
     ☐ DRAMA  
     ☐ ACTION  
     ☐ DOCUMENTARY  
   2. CLASSICS  
     ☐     ↓  
     ☐

100

**FIG. 5**

SLOT	PROGRAM
1	BLANK DISC
2	"RETURN OF THE JEDI"
3	NO DISC
4	"TO SIR WITH LOVE"
5	BLANK DISC
6	"SLEEPLESS IN SEATTLE"
7	"DAVE"
8	BLANK DISC
9	NO DISC
10	"TRUE GRIT"

110

**FIG. 6**

NEW RELEASES/COMEDY (20 TITLES)			
1	TITLE #1	120 MINS.	PG
2	TITLE #2	98 MINS.	R
3	TITLE #3	102 MINS.	PG-13
4	TITLE #4	108 MINS.	PG.
5	↓	↓	
6			
7			
8			

120

**FIG. 7**


7/23

## LEVEL 1 TIME-BASED SECURITY CODES


A	B	C
ONE 32 BIT CODE IN EACH MOVIE HEADER X 12 MONTHS X 100 YEARS = 1200 32 BIT CODES.	ONE 32 BIT CODE FOR EACH MONTH CHOSEN AT THE BEGINNING OF EACH MONTH AND TRANSMITTED BY DBS.	ONE 32 BIT CODE DELIVERED EACH MONTH BY PHONE/ MODEM WITH BILLING QUERY FROM CENTRAL CONTROLLER SYSTEM. C PROVIDED ONLY WHEN CUSTOMER IS IN GOOD STANDING.

**FIG. 8**

8/23

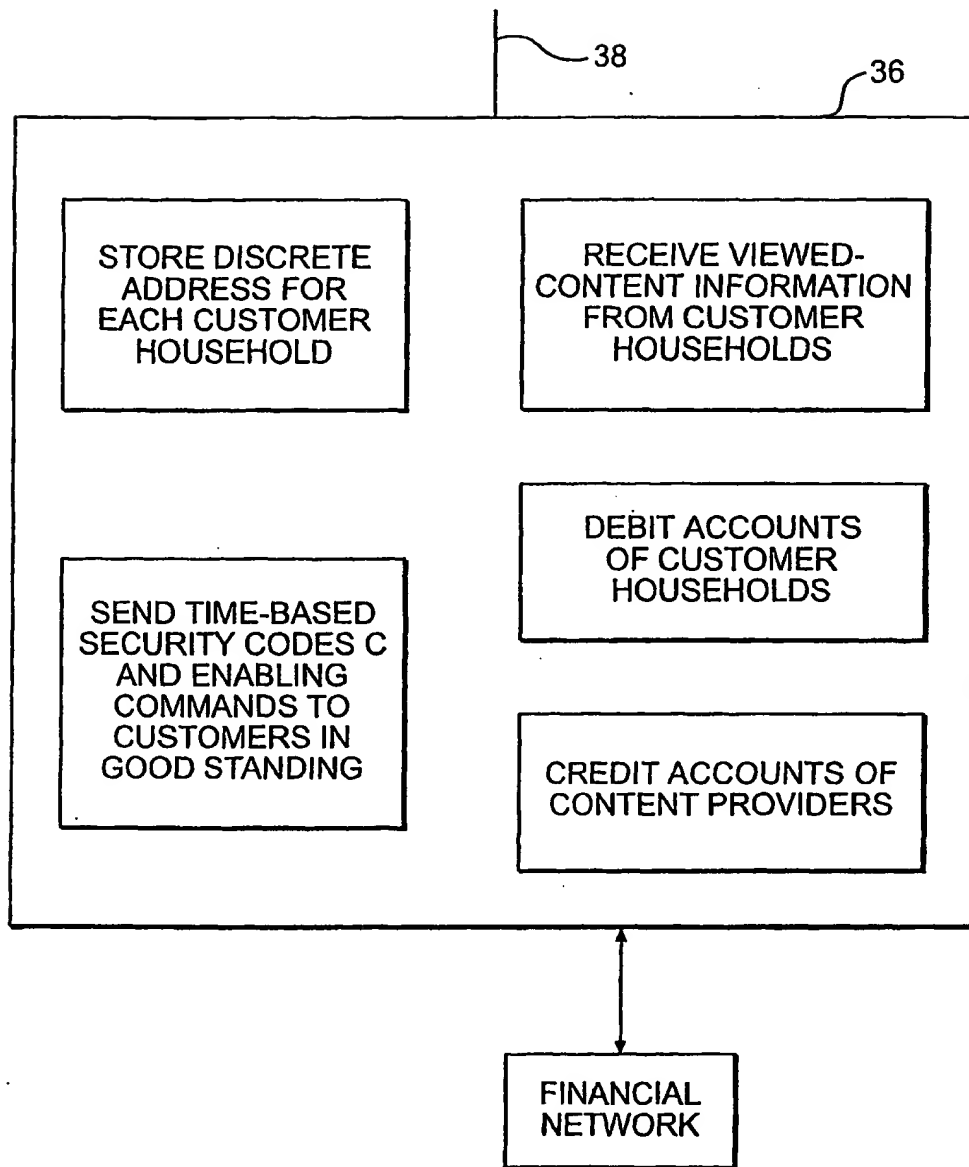**FIG. 9**

9/23

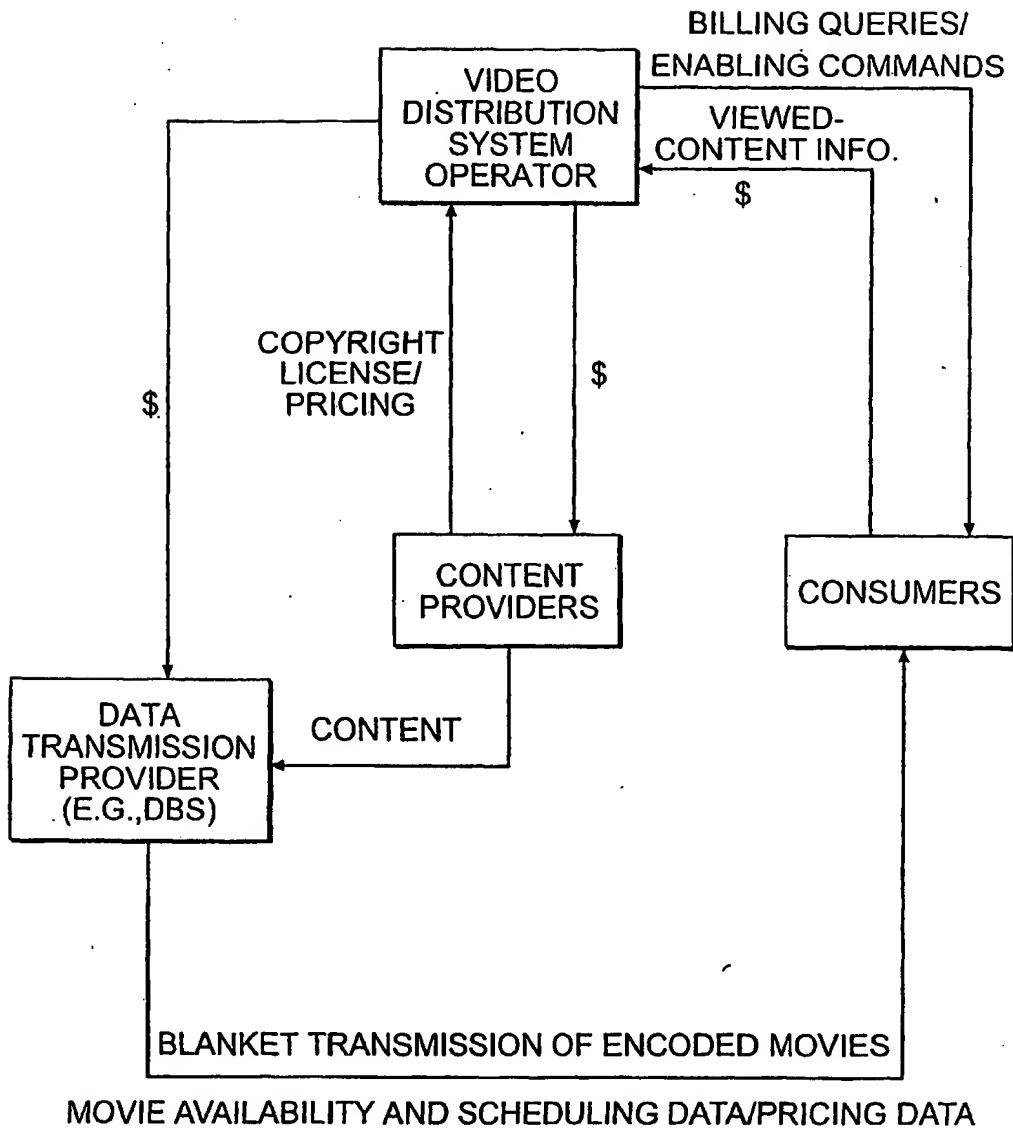**FIG. 10**

10/23

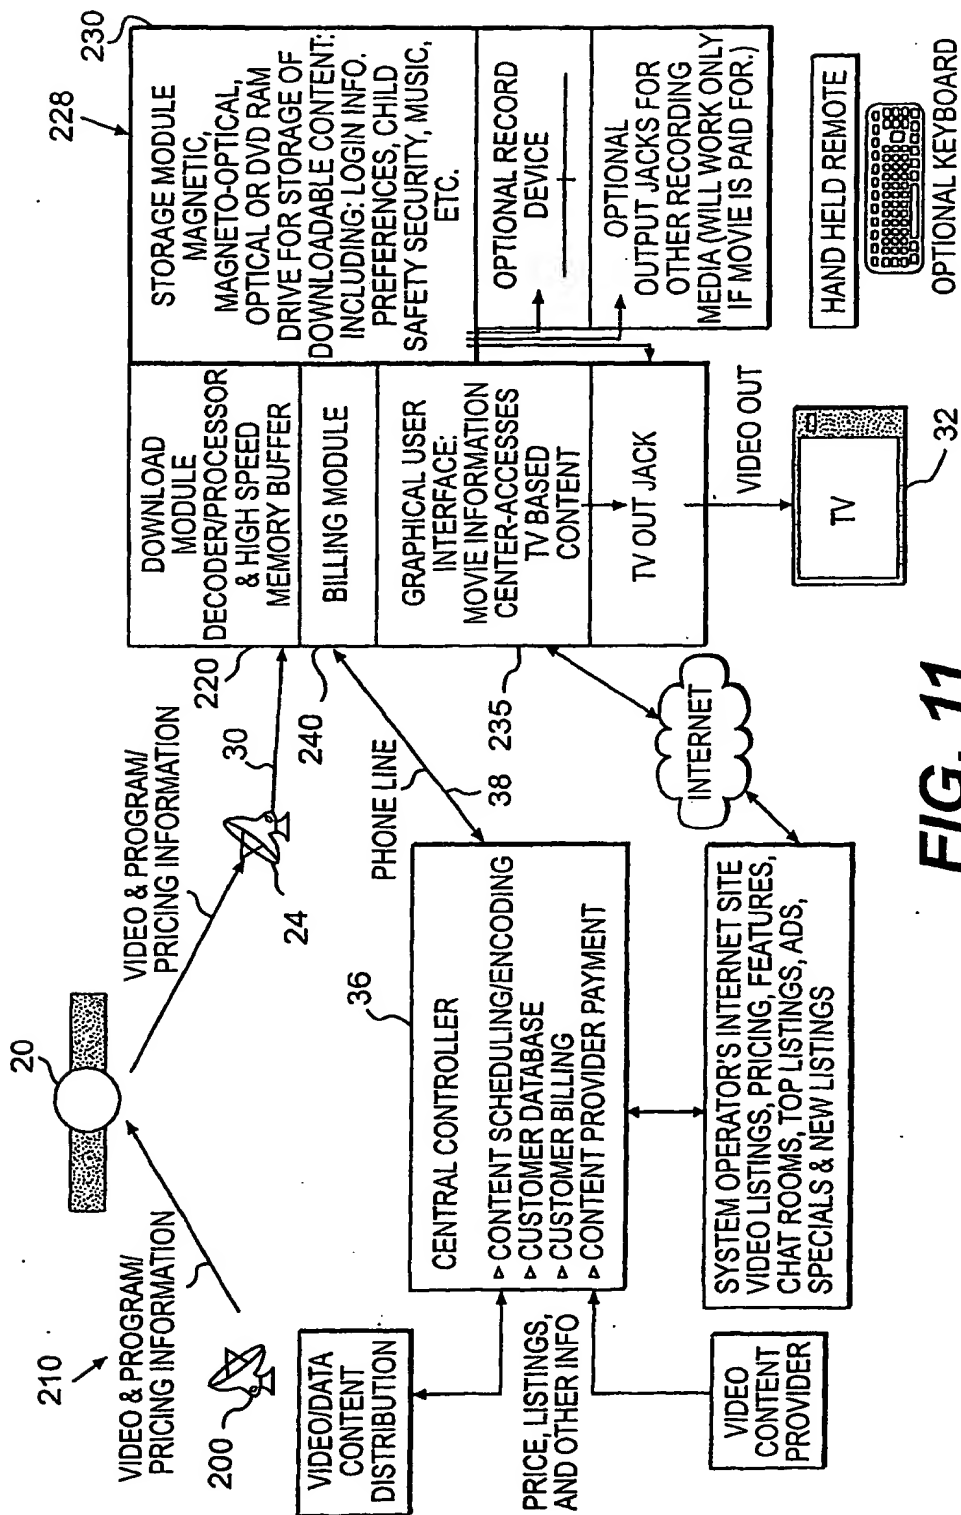


FIG. 11



11/23

STEP	MODE NAME	DESCRIPTION	HARDWARE INVOLVED
	ACCOUNT SETUP	HAPPENS WHEN CUSTOMER BUYS AND HOOKS UP THE USER STATION.	
1	SELECTION	CUSTOMER LOOKS AT RECENTLY UPDATED "CATALOG" OF AVAILABLE MOVIE SELECTIONS ON HIS TV USING THE GRAPHICAL USER INTERFACE. USE REMOTE TO PAGE THROUGH INFORMATION.	USER STATION, REMOTE, CUSTOMER TV, STORED CATALOG
2	ORDERING	CUSTOMER USES USER STATION, REMOTE AND TV SCREEN TO ORDER	USER STATION, REMOTE, CUSTOMER TV
3	DOWNLOADING	MOVIES ARE DOWNLOADED DURING TRANSMISSION HOURS AS ENCRYPTED, COMPRESSED FILES THROUGH CUSTOMER'S SATELLITE DISH TO HARD DISK IN USER STATION.	USER STATION, SATELLITE RECEIVER
4	VIEWING	CUSTOMER PLAYS MOVIE DIRECTLY FROM HARD DRIVE WITH DECRYPTION/DECOMPRESSING IN REAL TIME.	USER STATION, CUSTOMER TV AND SPEAKERS
5	BILLING	CUSTOMER'S ACCOUNT BILLED LATER BY MODEM OR INTERNET COMMUNICATION WITH CENTRAL CONTROLLER.	USER STATION
6	OPTIONAL "LIBRARY" MOVIE DELIVERY	FULL-QUALITY MOVIE ON SELECTED MEDIUM (E.G. DVD) THAT CAN BE PLAYED ON ANY DVD PLAYER IS BURNED WITH WATERMARK.	USER STATION, DVD BURNER

FIG. 12

12/23

SELECT MOVIE TYPE PREFERENCES	
ACTION	DOCUMENTARIES
ROMANTIC COMEDY	FOREIGN LANGUAGE
SCIENCE FICTION	MUSICALS
COMBAT	WESTERNS
ANIMATED	POLITICAL
FAMILY (G)	SUSPENSE

**FIG. 13**

SECOND LEVEL MOVIE PREFERENCES			
FAVORITE MOVIE STARS (MALE)	FAVORITE MOVIE STARS (FEMALE)	FAVORITE DIRECTORS	PREFERRED RATING(S)
MEL GIBSON TOM HANKS ↓	JULIA ROBERTS MEG RYAN ↓	GEORGE LUCAS JOHN DOE ↓	G PG PG-13 R X

**FIG. 14**

SUBSTITUTE SHEET (RULE 26)

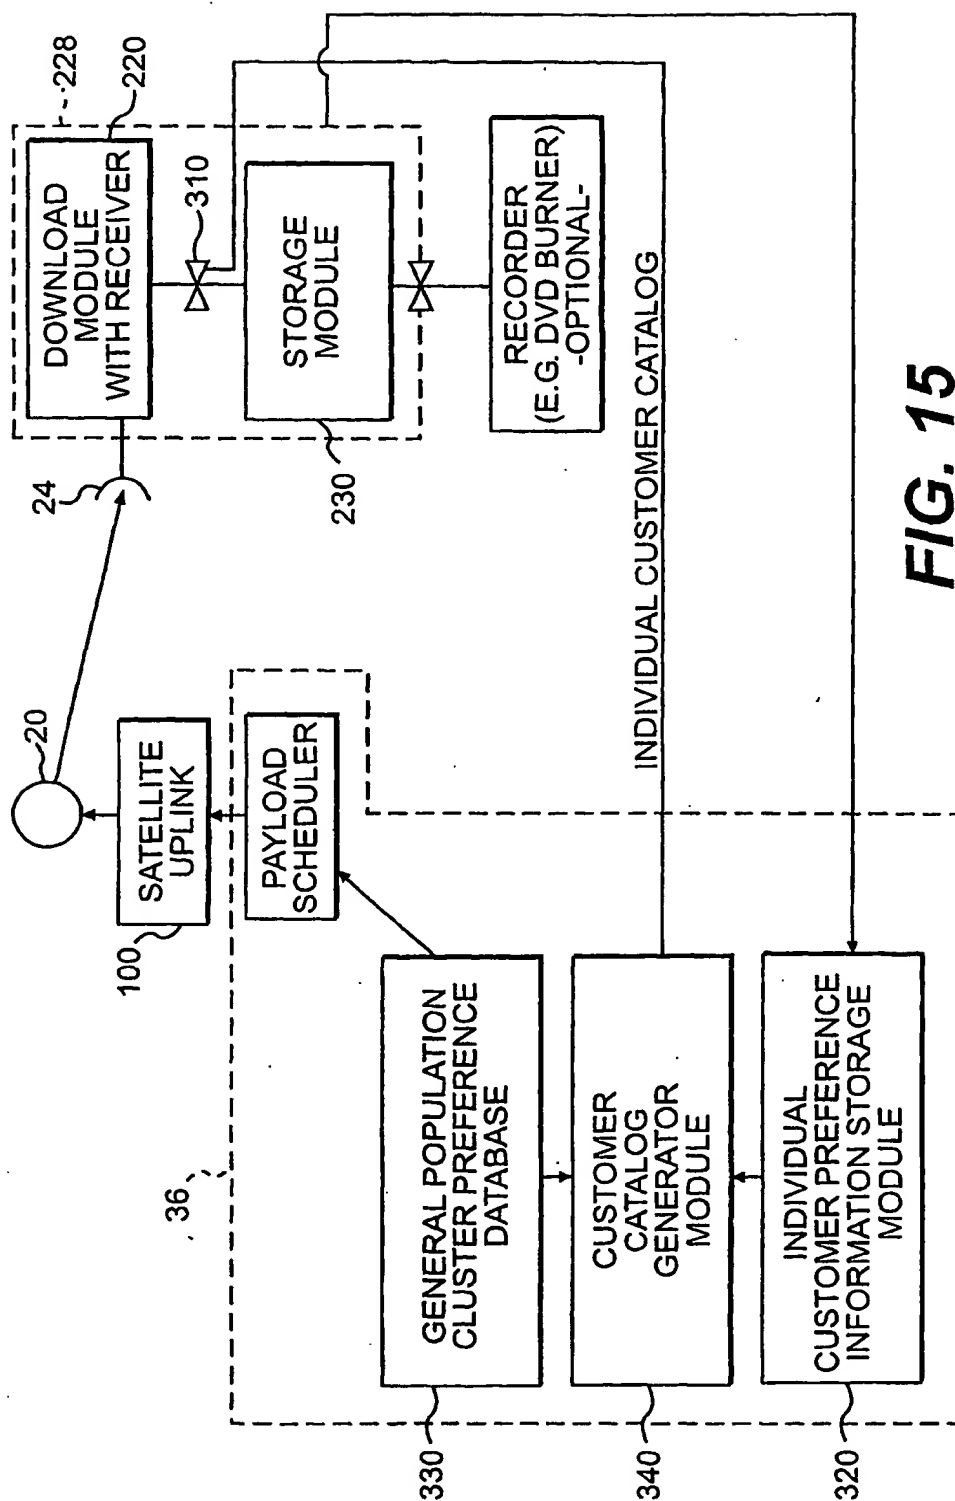


FIG. 15

14/23

## PROMOTION-BASED STREAMING

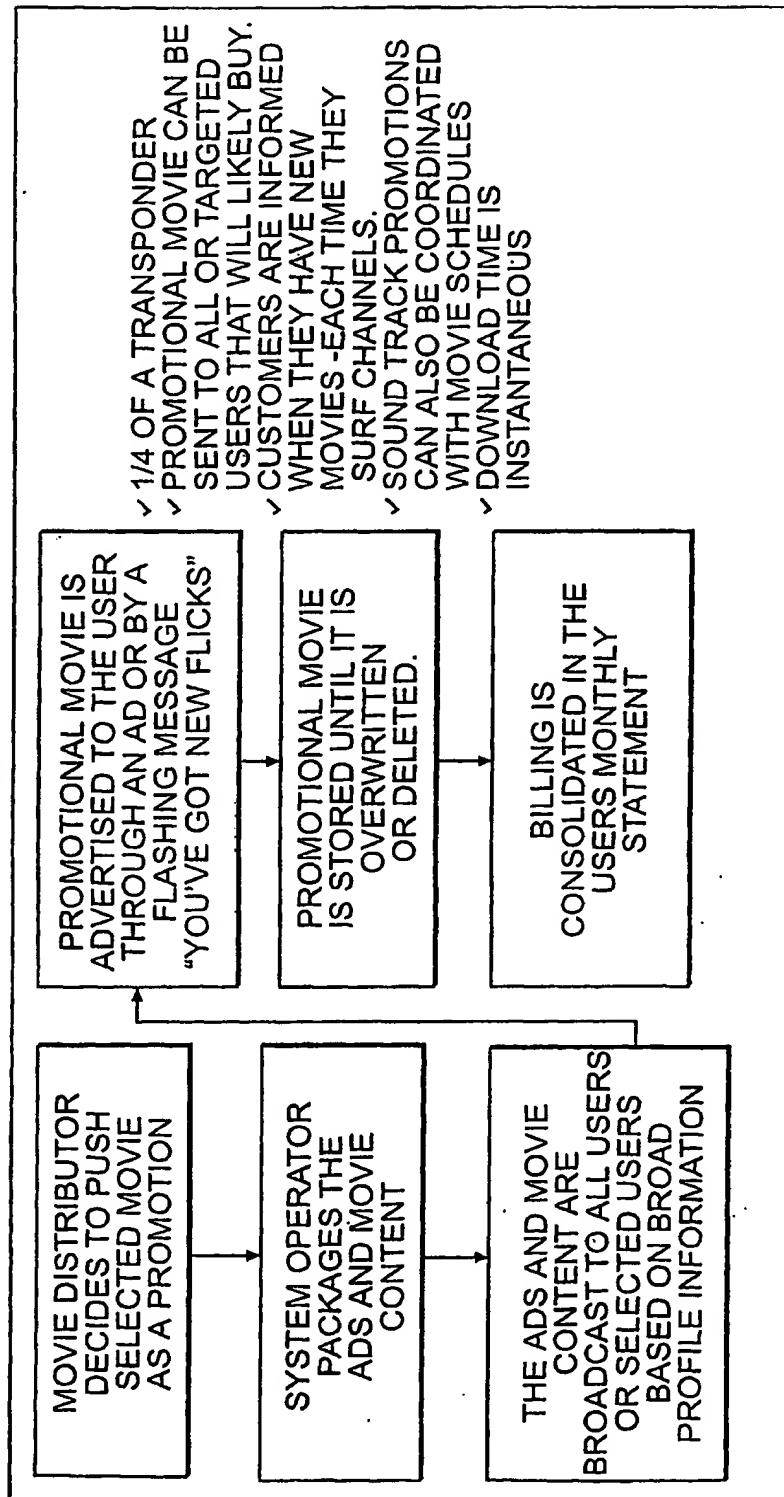


FIG. 16

15/23

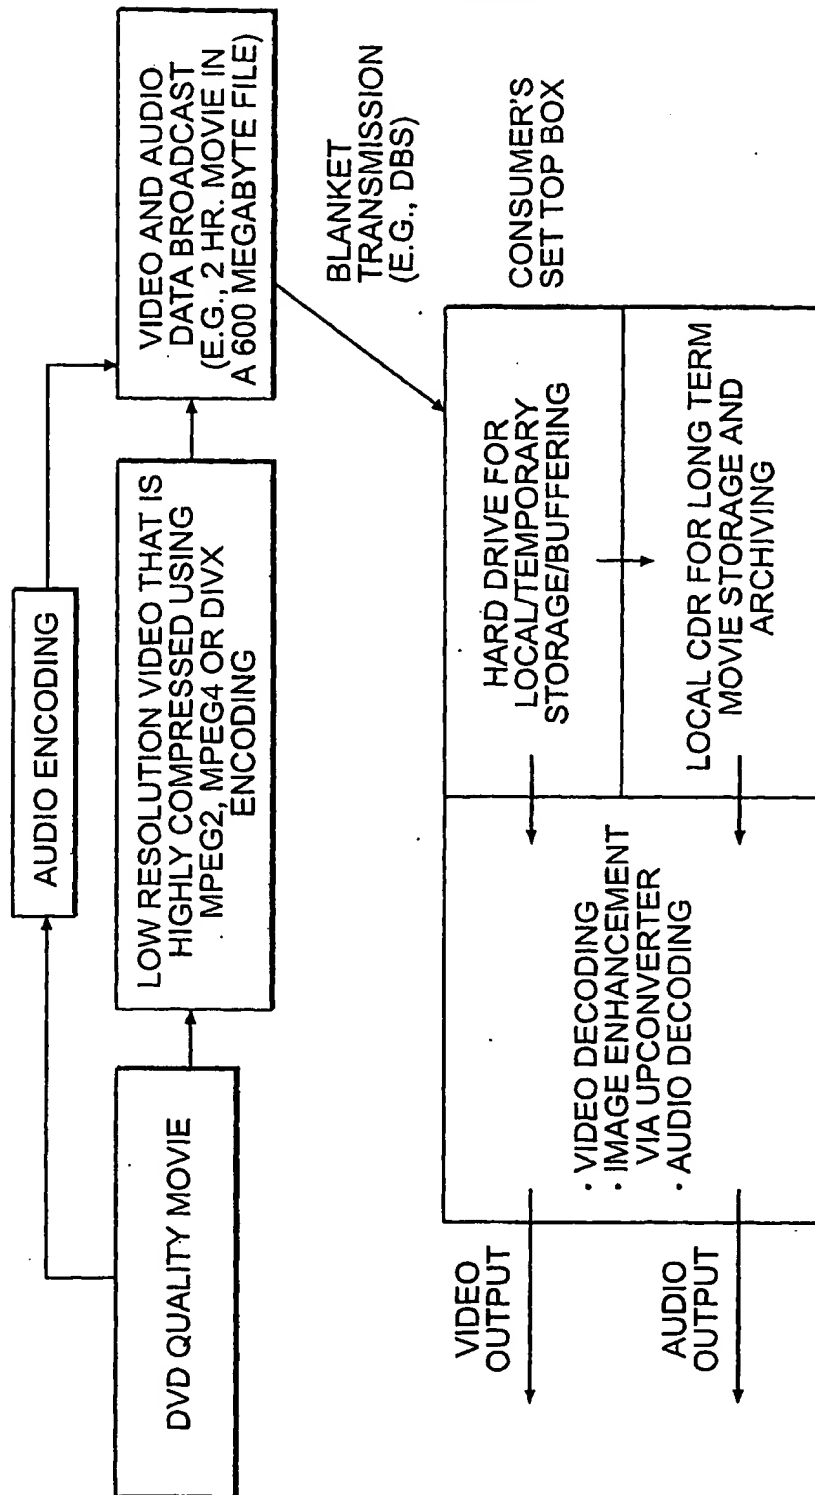


FIG. 17

16/23

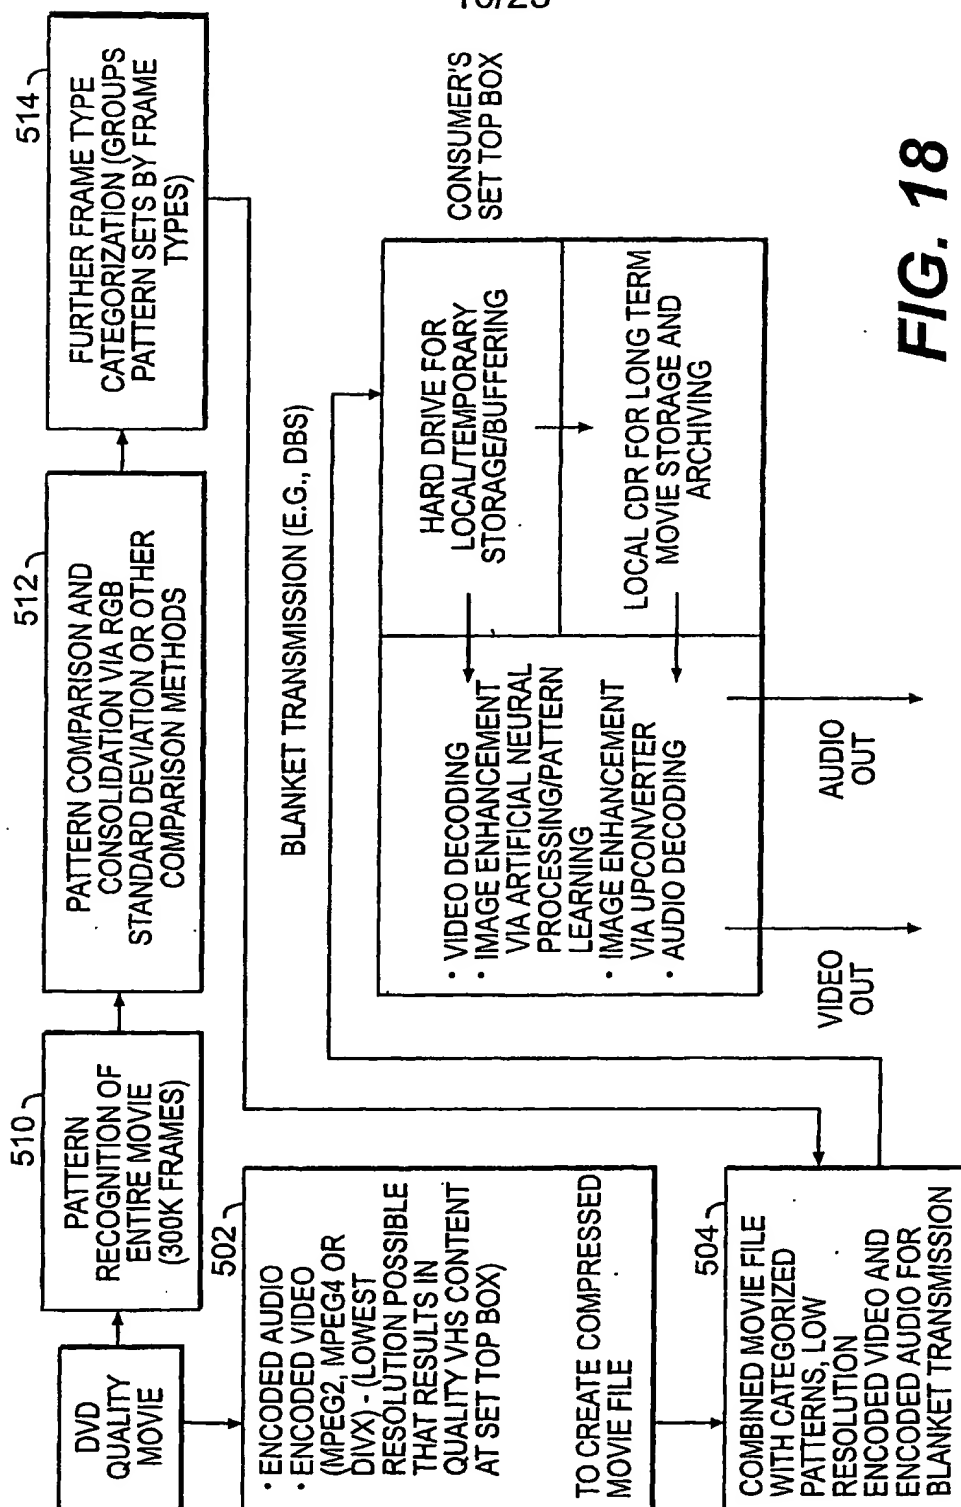
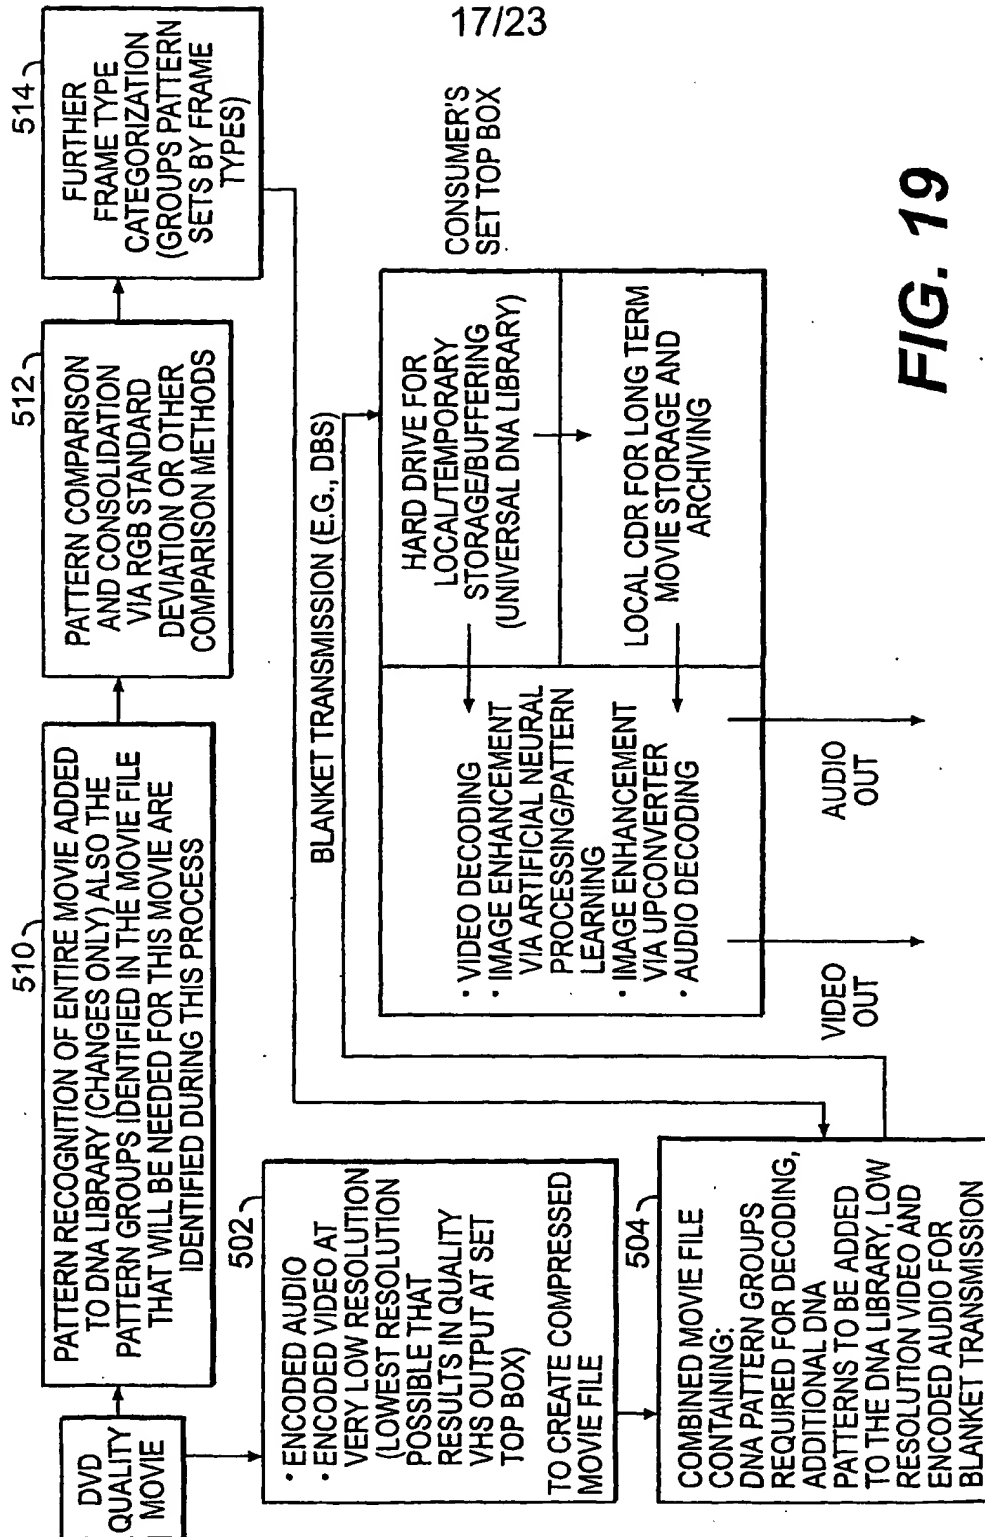


FIG. 18

17/23

**FIG. 19**

18/23


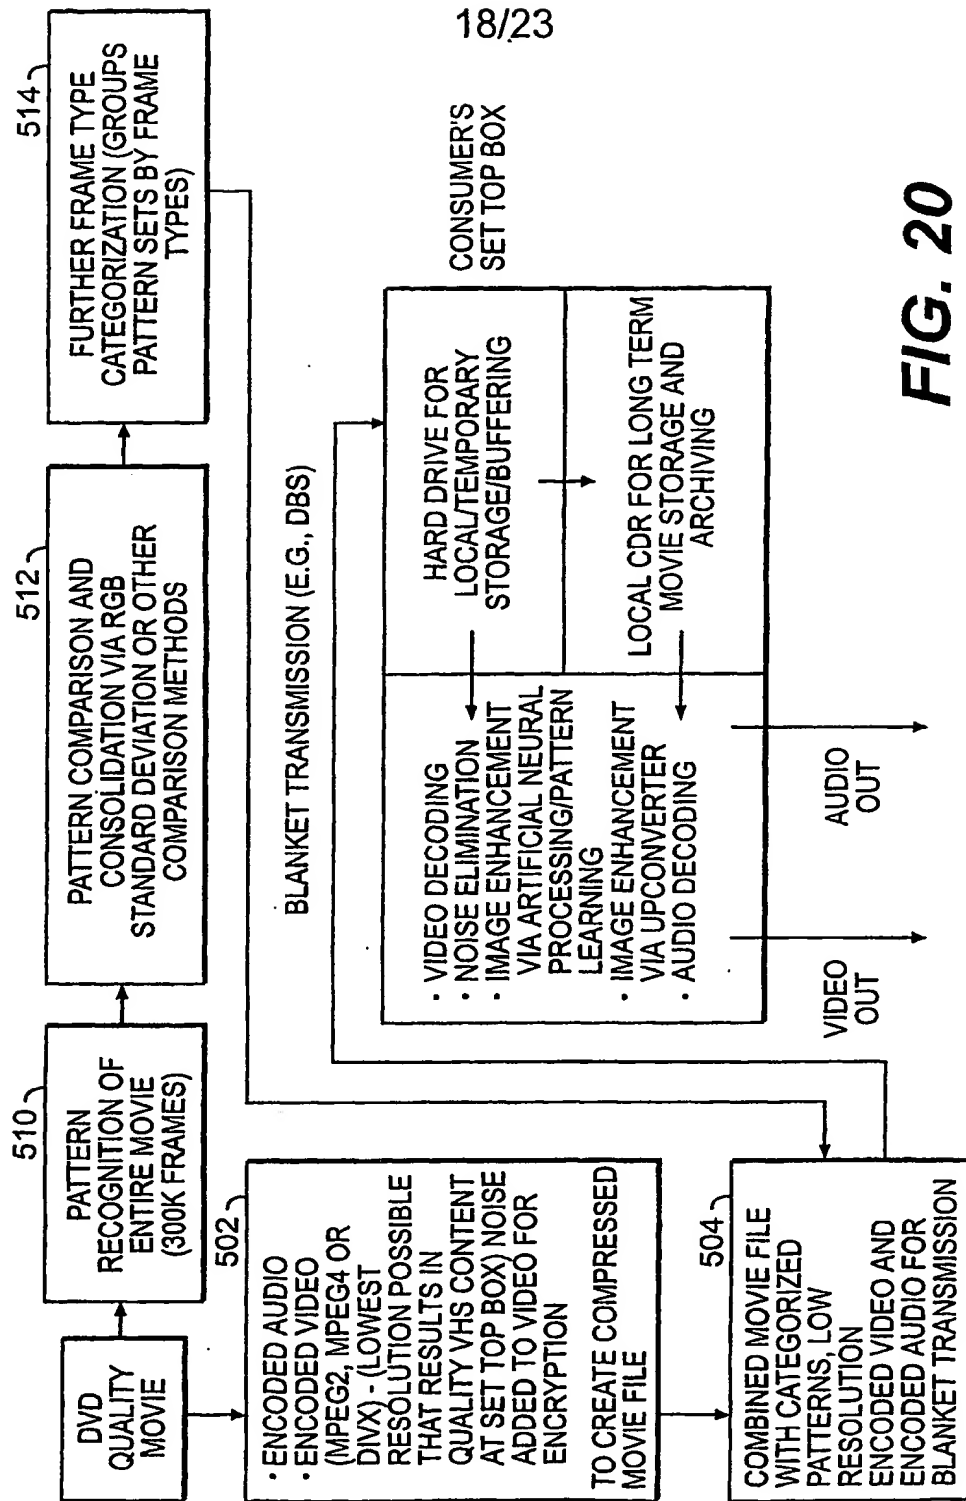



FIG. 20



19/23

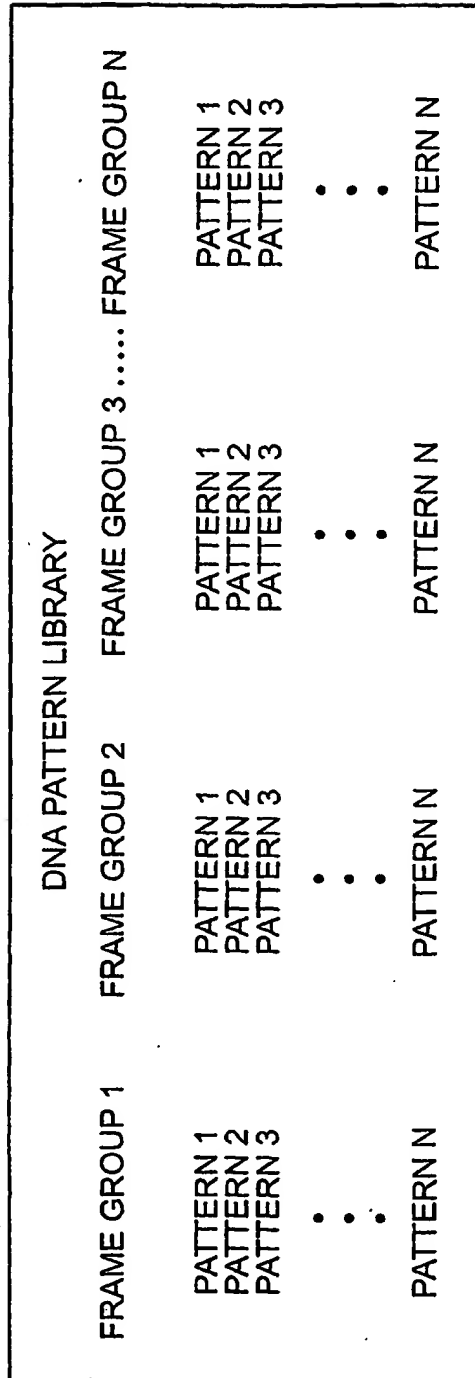


**FIG. 21**

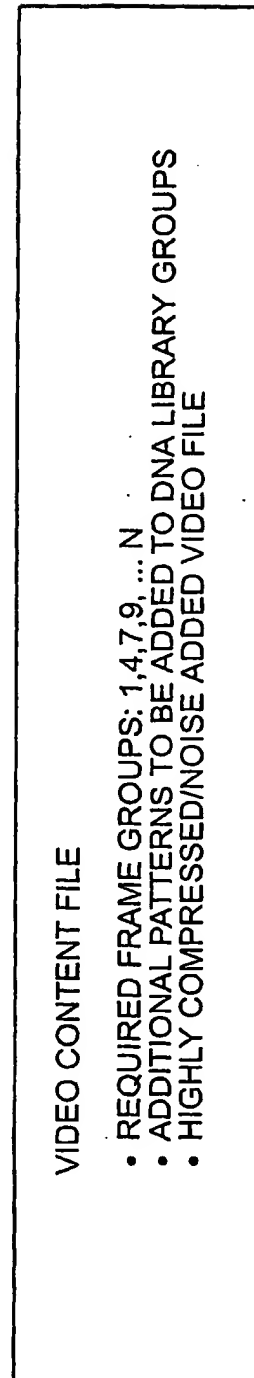

**FIG. 22**

20/23

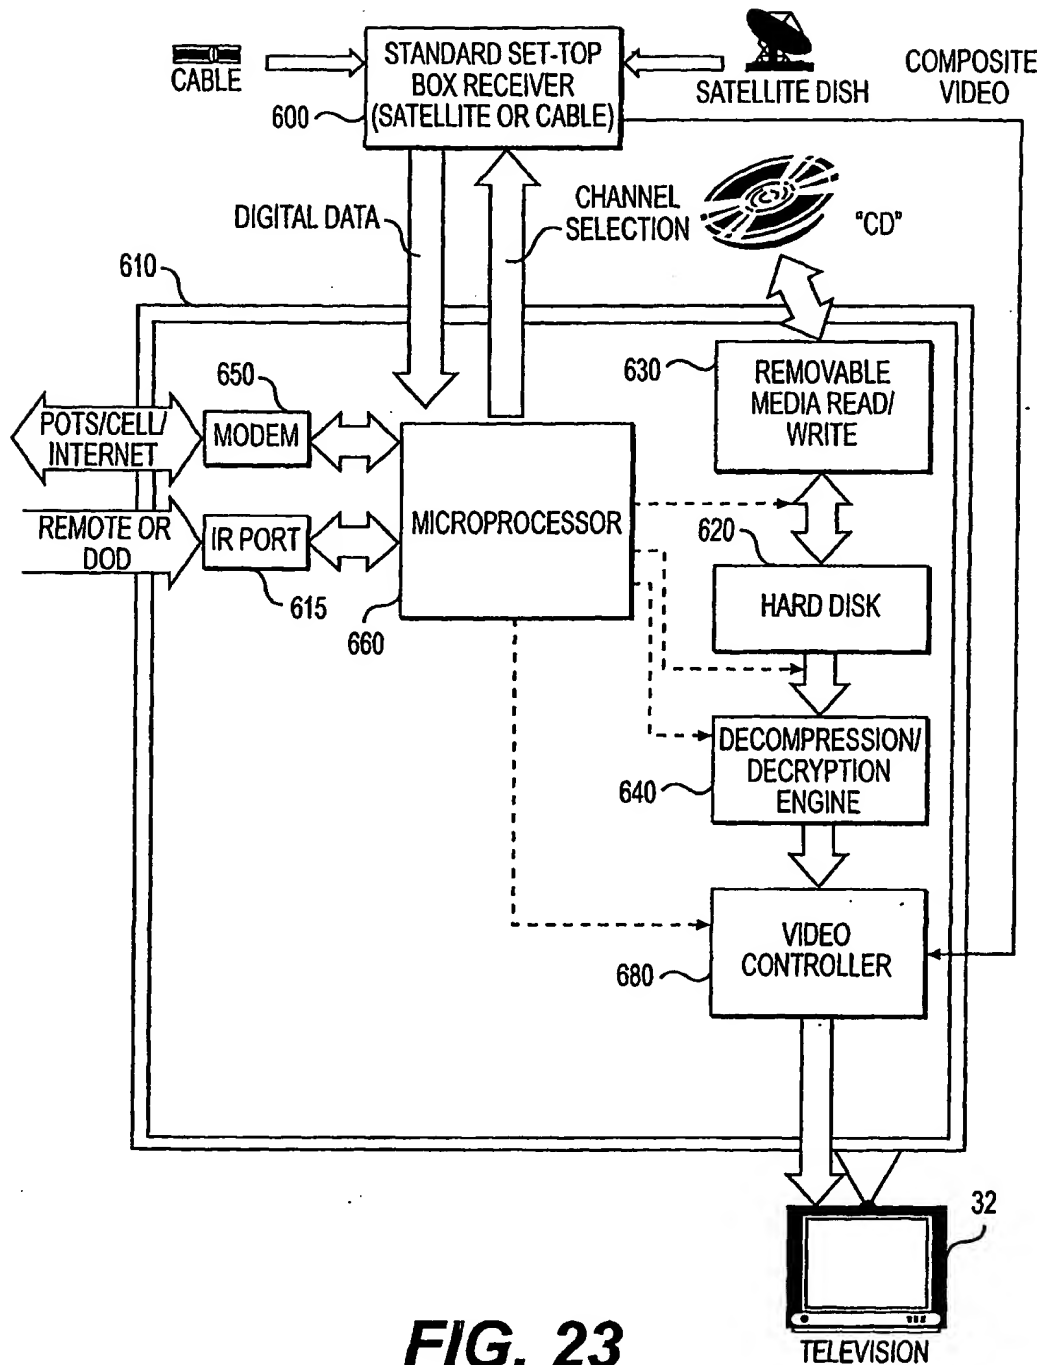**FIG. 23**

21/23



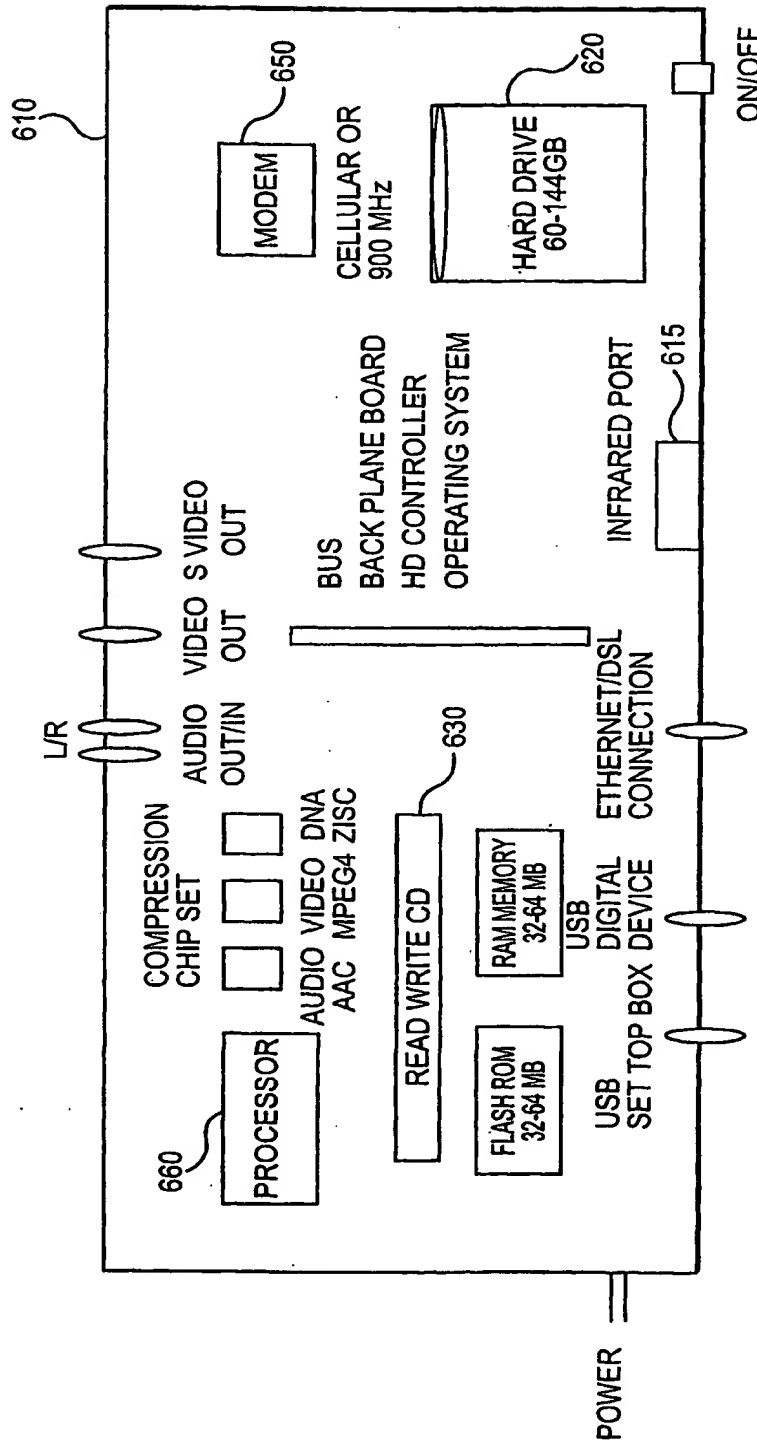


FIG. 24


22/23

**FIG. 25**


23/23

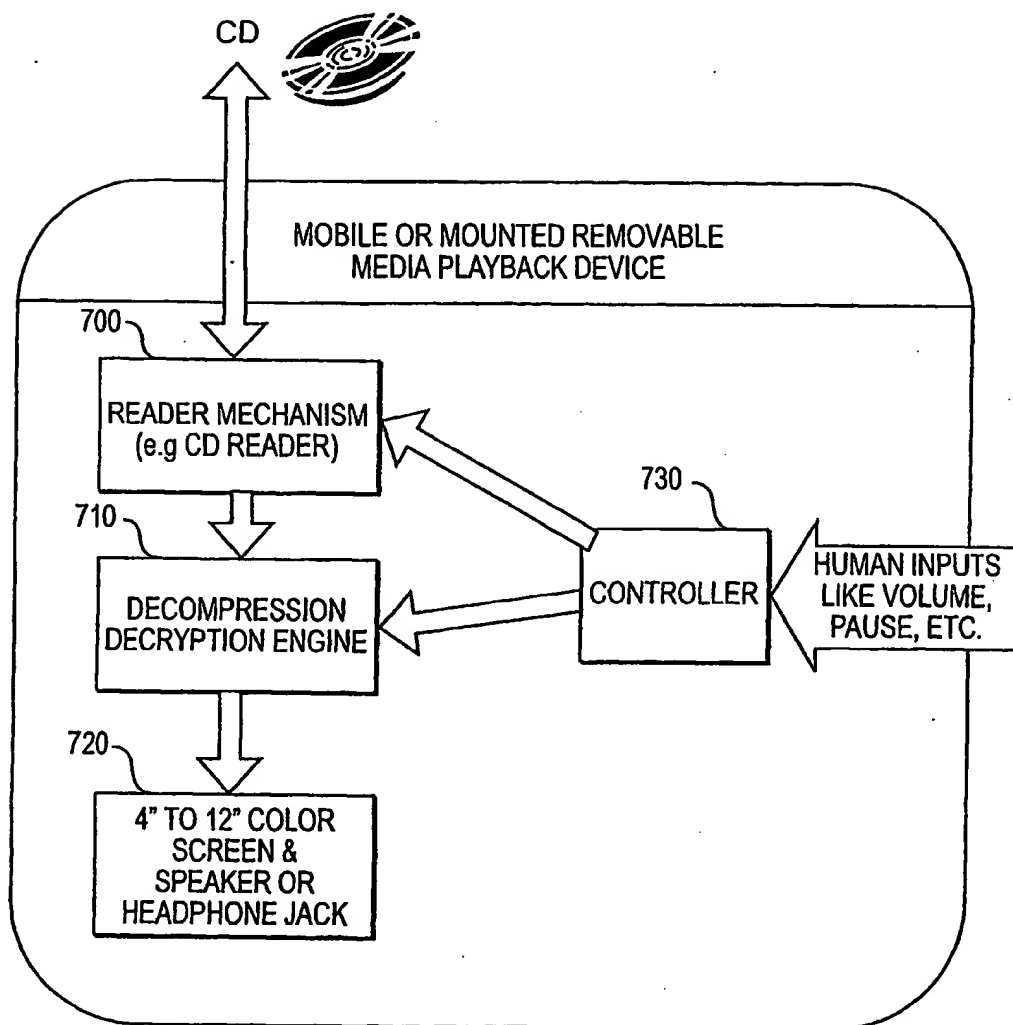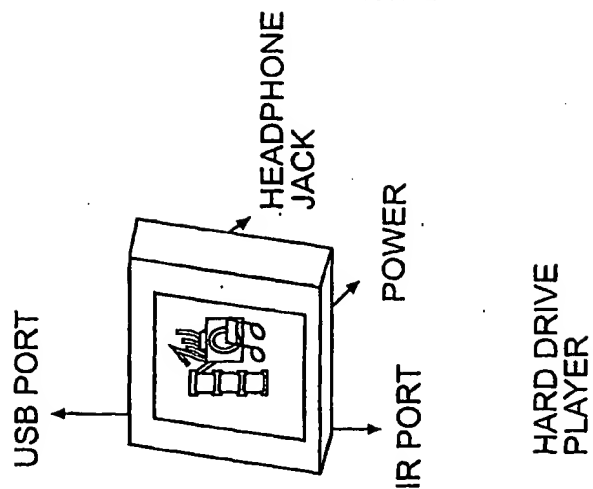

**FIG. 28**

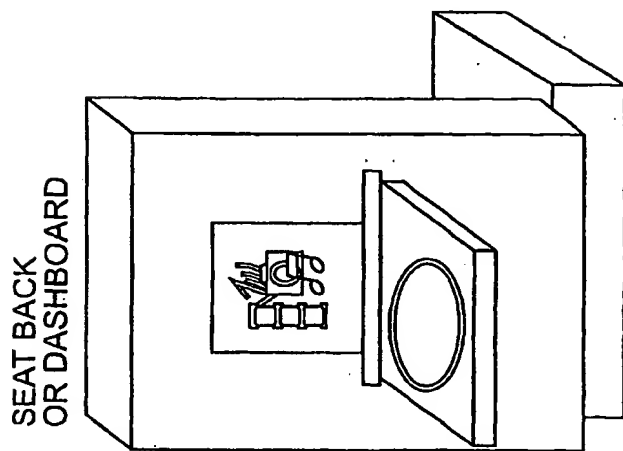

**FIG. 27**

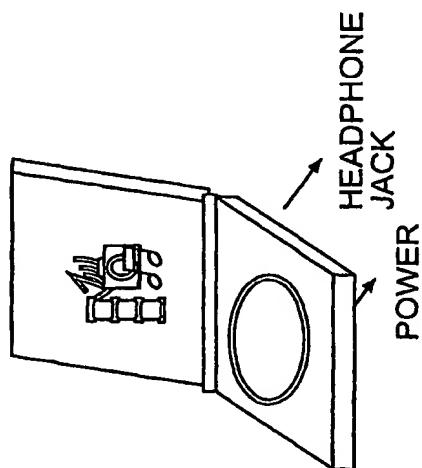

**FIG. 26**

# INTERNATIONAL SEARCH REPORT

Int. Application No.  
PCT/US 01/05675

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	WO 91 03112 A (DELTA BETA PTY LTD) 7 March 1991 (1991-03-07)  page 9, line 1 -page 11, line 17 page 13, line 2 -page 17, line 31	1,2,6,7, 10,11,16 19-33
Y A	WO 96 26605 A (SMART VCR LTD) 29 August 1996 (1996-08-29)  page 9, line 5 -page 12, line 4 page 15, line 9 -page 24, line 14	1,2,6,7, 10,11,16 19-33
A	EP 0 994 470 A (SONY CORP) 19 April 2000 (2000-04-19) page 2, column 1, line 21 - line 57 page 3, column 3, line 14 - line 54 page 5, column 8, line 4 - line 9  -/-	2-5, 11-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*S\* document member of the same patent family

Date of the actual completion of the international search

21 August 2001

Date of mailing of the international search report

28/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tlx. 31 651 epo nl  
Fax: (+31-70) 340-3016

Authorized officer

Van der Zaal, R

# INTERNATIONAL SEARCH REPORT

b  
International Application No  
PCT/US 01/05675

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WD 99 18727 A (DVD INC)  15 April 1999 (1999-04-15)  page 1, line 16 - line 22  figures 1-4</p>	19-33

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US 01/05675

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9103112 A	07-03-1991	AT 154182 T	15-06-1997
		AU 645028 B	06-01-1994
		CA 2064855 A	24-02-1991
		DE 69030886 D	10-07-1997
		DE 69030886 T	05-03-1998
		DK 573406 T	29-12-1997
		EP 0573406 A	15-12-1993
		ES 2104609 T	16-10-1997
		JP 3079208 B	21-08-2000
		KR 184237 B	15-05-1999
		RU 2106758 C	10-03-1998
		US 5421031 A	30-05-1995
		US 5701582 A	23-12-1997
WO 9626605 A	29-08-1996	US 5619247 A	08-04-1997
		US 6025868 A	15-02-2000
EP 0994470 A	19-04-2000	JP 2000123416 A	28-04-2000
		CN 1250932 A	19-04-2000
		US 6078560 A	20-06-2000
WO 9918727 A	15-04-1999	AU 1068899 A	27-04-1999
		EP 1013089 A	28-06-2000